NILOS

Product Catalog

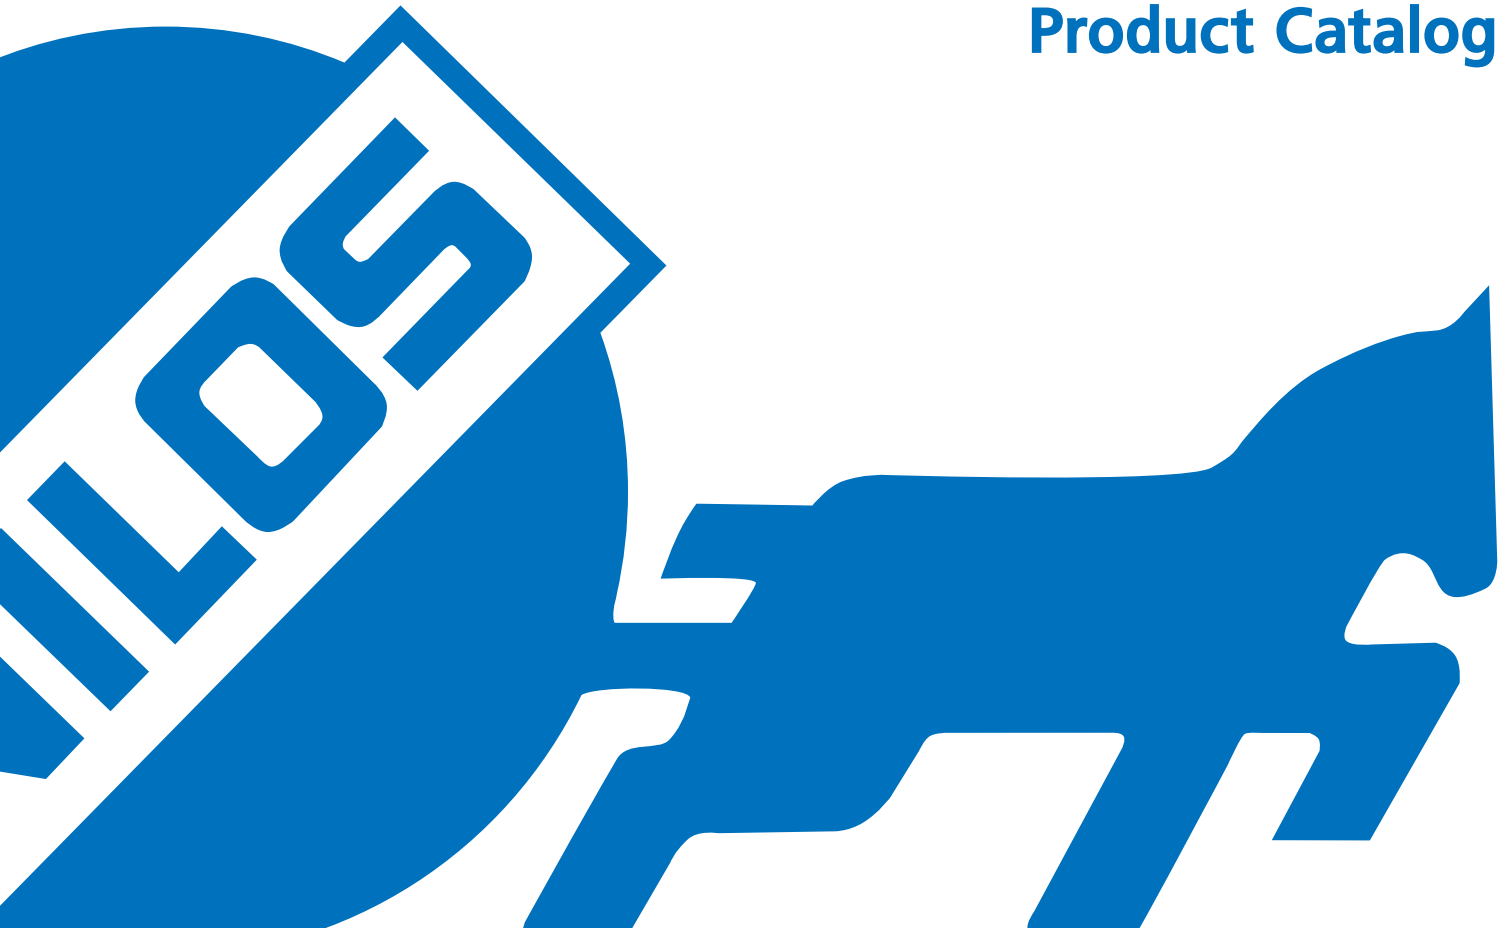

Contents

4 - 5 ZILLER Holding

Industrial Rubber

8 - 9 Hot vulcanizing Splicing kits for steel and fabric belts

10 - 11 Hot vulcanizing materials for fabric belts

12 - 13 Hot vulcanizing materials for steel cord belts

14 Hot vulcanizing materials

15 Cold vulcanizing materials with Repair kits

16 - 21 Cold vulcanizing materials

22 - 25 Pulley Lagging

26 - 30 Reflex- / Wear Protection Lagging

31 - 33 Standart Scraper Rubber

34 Impact Aprons

Conveyor belts

38 - 39 NILOS Conveyor belts

40 - 41 Cleats and Sidewalls for bonding on conveyor belts

42 Rubber Wear Protection Clamping Bars

43 Impact Bars

44 Jet-Streamer

45 - 47 NILOS Rollers

48 Idler Laggings

Mechanical Engineering

52 - 55 Vulcanizing Presses HYDRAULIC

56 - 59 Vulcanizing Press with Pressure bag EMU

60 - 61 Compact Press VULCOLITE

62 - 63 SPLICE-WATCH

64 VULCOFRAME

65 - 67 Repair Presses

68 - 69 ROTOCUT

70 - 71 Cord Stripper System

72 Belt Ripper

Tools

76 Screw Terminals and Belt and Clamps

77 Cable Winch, Ratchet Hook, Rope Block

78 Tool Bag

79 - 83 Small Tools

84 Rubber Cutting Machine

85 Regroover

86 - 87 Roughing Machine / Grindings

88 - 89 Accessoires

90 Cable Cutter

Services

94 - 95 Services, NILOS campus Belt Recycling

96 - 97 Technical questionnaire

98 Conversion Table

99 - 101 Registered Offices

ZILLER Holding

NILOS GmbH & Co. KG
Conveyor belt Equipment
- Installation service
- Scope of delivery and reconditioning of conveyor belts
- Wear resistant lagging and lining
- Vulcanizing presses
- Tools
- Materials for hot vulcanization, cold bonding and repair
- Spare parts
- Belt cleaning systems

info@nilos.de
Watch our Company-Movie on
www.nilos.de

ZILLER GmbH & Co. KG
Seals for Anti-friction Bearing
- NILOS-Ring for grease lubricated ball
- Roller and taper roller bearings
- Z and RS bearings
- NILOS-Ring LSTO labyrinth seals
- Distance rings

info@nilos-ring.de
www.nilos-ring.de

KROLL & ZILLER GmbH & Co. KG
Gasket Technology
- G-ST flange and profile gaskets
- Sealing technology
- Other flange gaskets and packings

info@kroll-ziller.de
www.kroll-ziller.de

NILOS

2015
NILOS Rollers

2010
Certification of all companies within the
Ziller Holding according to DIN EN ISO 9001:2008

2009
New Scope: NILOS campus

1995
Introduction of the Quality Management system

1975
Various company acquisitions at home and abroad

1949
Foundation: NILOS GmbH

1941
Foundation: Ziller & Co. roller bearing seals
Foundation: Kroll & Ziller flange

1926
Engineering Office Paul Wever - Entry Hans J. Ziller

1951

1953

1956

1957

1965

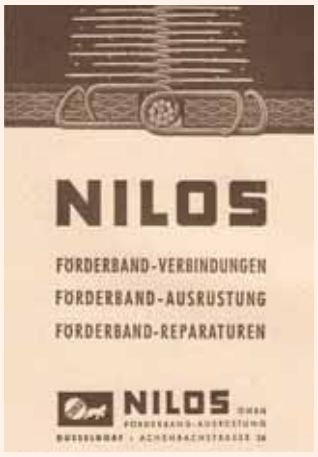

1966

NILOS

Industrial Rubber

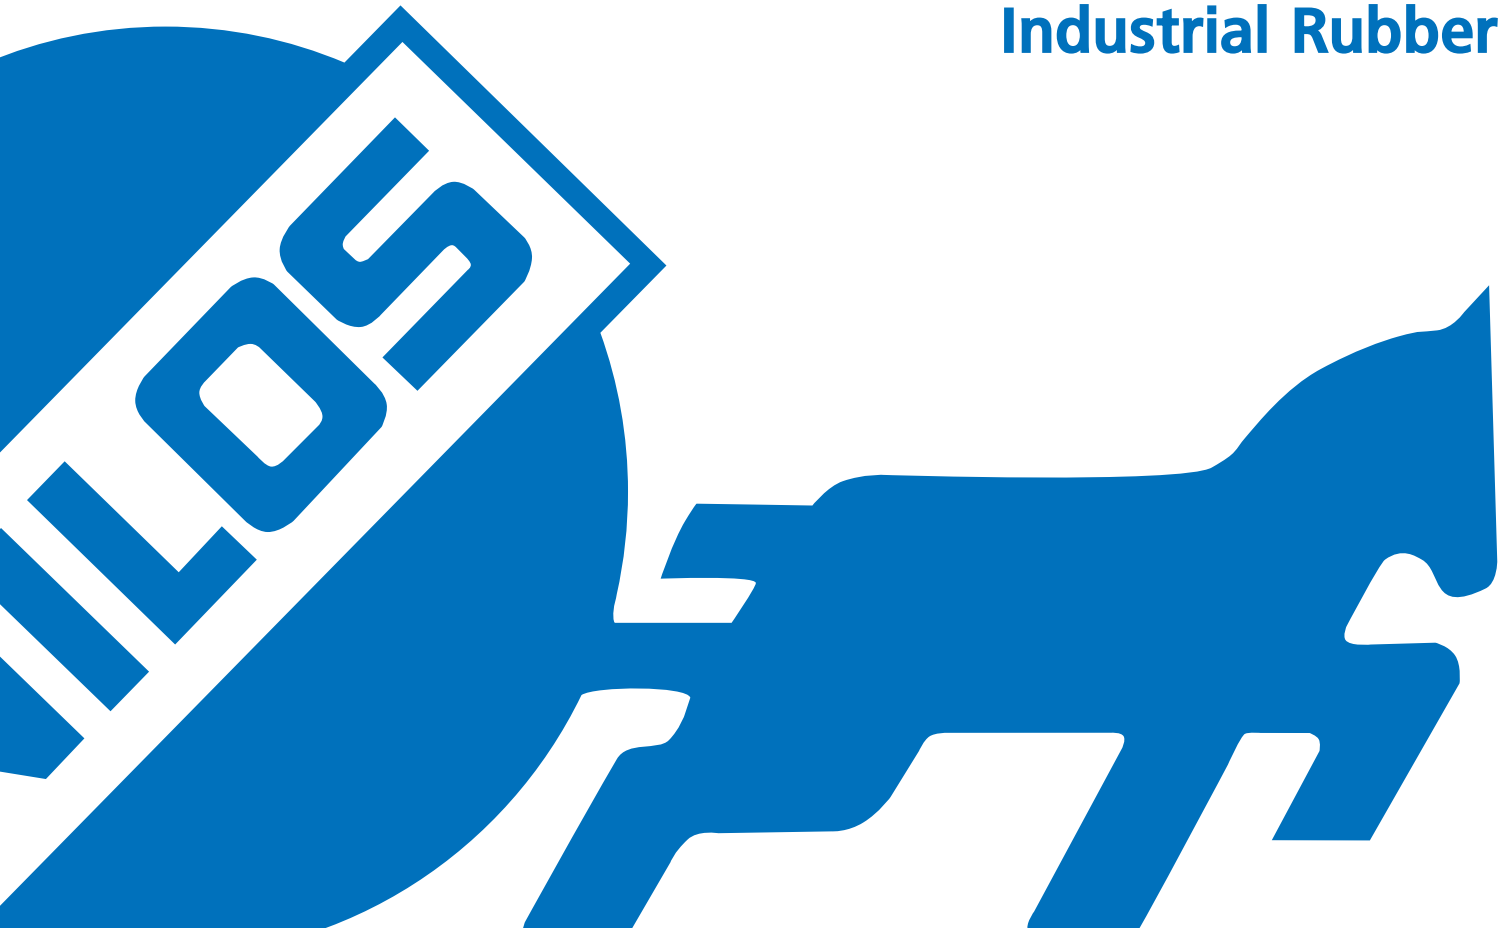

Hot vulcanizing Splicing kits for steel and fabric belts

Hot vulcanizing Splicing kits for steel cord and fabric belts

General information about Splicing kits for steel cord and fabric conveyor belts.

NILOS splicing materials are designed with an overall composition to fit the conveyor belt compounds of most manufacturers.
Knowing technical details of the belt to be spliced, NILOS offers individually for every customer and every belt a splicing kit with all the components and amounts needed.

The following details are necessary:

- conveyor belt width
- details of quality (EP/ST)
- splicing length (alternativ as per DIN)
- rhombic 16° 42’; 22°, rectangular 90°
- thickness of top and bottom cover

Hot Splicing kits for fabric belts:
- Cover plate
- Intermediate rubber
- Hot-Solution L-1000
- Silicone paper

Hot Splicing kits for steel cord belts:

Top covers:
- Cover plate
- Core plate Type K-STG
- Pressure fabric

Bottom covers:
- Cover plate
- Core plate Type K-STG
- Shirting
- Rubber strips STG-S
- Hot-Solution STG-B

Our work instructions for hot processing
see www.nilos.de

Hot vulcanizing materials for fabric belts

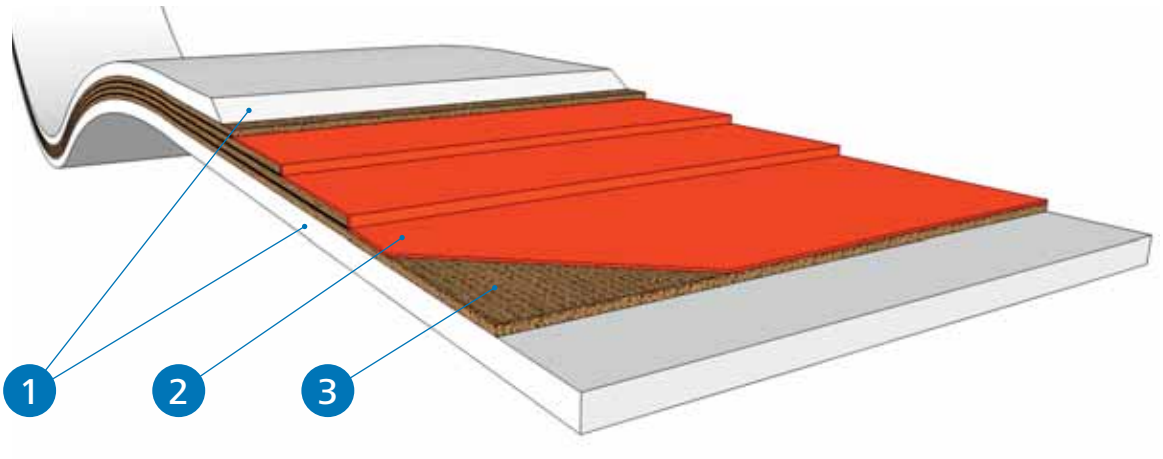

1

Cover plate Type D-Gi-X, uncured, black, Elastomer SBR, NR

Density	1,13 g/cm³	DIN 53479
Hardness	60 ± 5 Sh° A	DIN 53505
Abrasion	115 mm³	DIN 53516

Thickness *	Width *	Item no.
1 mm	500 mm	H 0277-N
2 mm		H 0278-N
3 mm		H 0279-N
4 mm		H 0280-N
5 mm		H 0281-N
6 mm		H 0282-N

2

Intermediate Rubber Type Z-Gi-X uncured, black

Density	1,13 g/cm³	DIN 53479
Hardness	60 ± 5 Sh° A	DIN 53505
Abrasion	115 mm³	DIN 53516

Thickness	Width	Item no.
0,8 mm	500 mm	H 0295-N
1,0 mm		H 0206-N

1

Cover plate Type D-Gi-V, uncured, self-extinguishing quality, black, Elastomer CR

Density	1,49 g/cm³	DIN 53479
Hardness	65 ± 5 Sh° A	DIN 53505

Thickness *	Width *	Item no.
1 mm	500 mm	H 0283-N
2 mm		H 0284-N
3 mm		H 0285-N
4 mm		H 0286-N
5 mm		H 0287-N
6 mm		H 0288-N

2

Intermediate Rubber Type Z-Gi-V uncured, self-extinguishing quality, black

Density	1,49 g/cm³	DIN 53479
Hardness	65 ± 5 Sh° A	DIN 53505

Thickness	Width	Item no.
0,8 mm	500 mm	H 0207-N
1,0 mm		H 0208-N

* Other contents on request

Hot vulcanizing materials for fabric belts

General Information

To splice or repair a fabric belt, apart from the vulcanizing solution, uncured material as cover plate and intermediate rubber is required.

Our work instructions for hot processing see www.nilos.de.

1

Cover plate Type D-Gi-NBR, uncured, oil- and grease-resistant, black, Elastomer NBR

Density	1,23 g/cm³	DIN 53479
Hardness	65 ± 5 Sh° A	DIN 53505
Abrasion	145 mm³	DIN 53516

Thickness *	Width *	Item no.
1 mm	500 mm	H 0200-N
2 mm		H 0201-N
3 mm		H 0202-N
4 mm		H 0203-N
5 mm		H 0204-N
6 mm		H 0205-N

2

Intermediate Rubber Type Z-Gi-NBR, uncured, oil- and grease-resistant, black, Elastomer NBR

Density	1,23 g/cm³	DIN 53479
Hardness	65 ± 5 Sh° A	DIN 53505
Abrasion	145 mm³	DIN 53516

Thickness	Width	Item no.
0,8 mm	500 mm	H 0209-N
1,0 mm		H 0210-N

3

Fabric for hot vulcanizing, rubberized on both sides, uncured

Width x Length *	Type	Item no.
1.000 x 10.000 mm	EP 160	H 0305

other materials can be found on page 14

* Other contents on request

Hot vulcanizing materials for steel cord belts

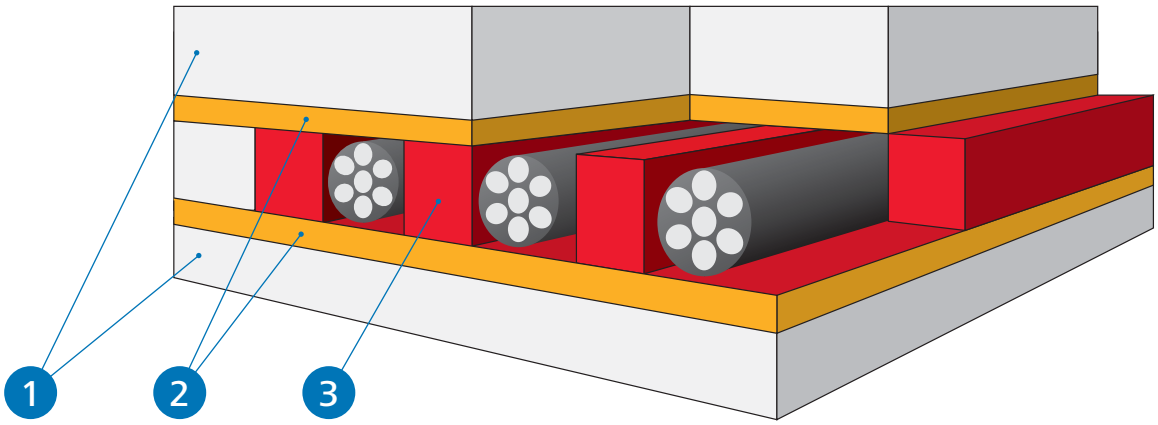

1

Cover plate Type D-Gi-X, uncured, black, Elastomer SBR, NR

Density	1,13 g/cm³	DIN 53479
Hardness	60 ± 5 Sh° A	DIN 53505
Abrasion	115 mm³	DIN 53516

Thickness *	Width *	Item no.
1 mm	500 mm	H 0277-N
2 mm		H 0278-N
3 mm		H 0279-N
4 mm		H 0280-N
5 mm		H 0281-N
6 mm		H 0282-N

1

Cover plate Type D-Gi-Y, uncured, black, Elastomer SBR, NR

Density	1,15 g/cm³	DIN 53479
Hardness	60 ± 5 Sh° A	DIN 53505
Abrasion	< 100 mm³	DIN 53516

Thickness *	Width *	Item no.
1 mm	500 mm	H 0277-Y
2 mm		H 0278-Y
3 mm		H 0279-Y
4 mm		H 0280-Y
5 mm		H 0281-Y
6 mm		H 0282-Y

1

Cover plate Type D-Gi-V, uncured, self-extinguishing quality, black, Elastomer CR

Density	1,49 g/cm³	DIN 53479
Hardness	65 ± 5 Sh° A	DIN 53505

Thickness *	Width *	Item no.
1 mm	500 mm	H 0283-N
2 mm		H 0284-N
3 mm		H 0285-N
4 mm		H 0286-N
5 mm		H 0287-N
6 mm		H 0288-N

* Other contents on request

Hot vulcanizing materials for steel cord belts

General Information

The following components are required to splice or repair steel cord belts:

- vulcanizing solution
- uncurede rubber
  (Cover plate, Core plate and Rubber strips).

Our work instructions for hot processing see www.nilos.de.

2

Core plate Type K-STG, uncured

Thickness *	Width *	Item no.
2 mm	500 mm	H 0297-N

3

Rubber strips Typ S-STG, uncured

Thickness x Width *	VPE	for steel cord	Item no.
2,0 x 5 mm	2 kg	ST 1000	H 0299-A
2,5 x 6 mm		ST 1250	H 0271-B
2,0 x 7 mm		ST 1600	H 0299
2,5 x 7 mm		ST 2000	H 0271-A
2,5 x 8 mm		ST 2500	H 0271
2,0 x 9 mm		ST 3500	H 0299-B
2,0 x 11 mm		ST 4500	H 0272-C
2,0 x 12 mm		ST 5000	H 0272-A
2,0 x 13 mm		ST 5400	H 0272-B

The rubber strips can be used with NILOS hand extruder on page 21.

other materials can be found on page 14

* Other contents on request
VPE = Items per unit

Hot vulcanizing materials

Shirting

Width	Length *	Item no.
1.000 mm	50 m	H 0316

Silicon paper

Width	Length *	Item no.
1.000 mm	50 m	H 0317-C

Pressure fabric

Width	Length *	Item no.
1.000 mm	10 m	H 0318

STG-B, flammable

Solution for hot repairs and splicing of fabric and steel cord conveyor belts

Solution *	Unit	Item no.
700 g	Tin	H 0312

L-1000, flammable

Solution for hot repair and splicing of fabric conveyor belts

Solution *	Unit	Item no.
700 g	Tin	H 0308

L-NBR, flammable

Solution for hot repair and splicing of fabric conveyor belts in oil and grease resistant quality

Solution	Unit	Item no.
700 g	Tin	H 0353

* Other contents on request

Cold vulcanizing materials with Repair kits

General information about cold materials with Repair kids.

Our repair materials are perfectly matched.

With information on the conveyor belt to be joined is customized for a matching connector kit with all the components and quantities required to specified and available.

Repair kits for fabric belts:

- Hard cover TH
- Cover layer TOPGUM TD und TDG
- Cold cement TOPGUM TL-T60
- Filler layer TOPGUM TS

Our work instructions for cold processing see www.nilos.de

RELIABLE EVEN BETTER. TRI-FREE

TRICHLORETHYLEN(E) FREI/FREE

NEW

NON FLAMMABLE *NO BENZINE AND* FREE OF *TRICHLOROETHYLENE*

Cold cement for repair of fabric and steel cord conveyor belts and splicing of fabric conveyor belts.

TOPGUM TL-T70 TRI-FREE
free of trichloroethylene, non flammable

Cement	Hardener	Unit	Item no.
1000 g	1 x 40 g	1 Set	H 0257
1000 g	-	Tin	H 0257-K

Solution for hot repair and splicing of fabric and steel cord conveyor belts

STG-FW TRI-FREE
free of trichloroethylene, non flammable

Solution	Unit	Item no.
1000 g	Tin	H 0313

Change now

- alternative to the known products
- identical properties with optimized formula
- application in the usual NILOS Quality

Cold cement

TOPGUM TL-T50, flammable

Cold cement, especially for large surfaces, e.g. lining.

Cement *	Hardener	Unit	Item no.
700 g	1 x 40 g	1 Set	H 0050
700 g	-	Tin	H 0050-K

TOPGUM TL-T60, flammable

Cold cement for repair of fabric and steel cord conveyor belts and splicing of fabric conveyor belts.

Cement *	Hardener	Unit	Item no.
700 g	1 x 40 g	1 Set	H 0259
700 g	-	Tin	H 0259-K

TOPGUM TL-PVC, flammable

Cold cement for repair and splicing of PVC conveyor belts.

Cement *	Hardener	Unit	Item no.
700 g	1 x 40 g	1 Set	H 0269
700 g	-	Tin	H 0269-K

TOPGUM TL-W, flammable

Cold cement for repair and splicing of fabric conveyor belts in food applications.

Cement *	Hardener	Unit	Item no.
700 g	1 x 40 g	1 Set	H 0273
700 g	-	Tin	H 0273-K

TOPGUM RP, flammable

Repair paste for filling of damaged surfaces and repairs on conveyor belts.

Cement	Hardener	Unit	Item no.
700 g	1 x 40 g	1 Set	H 0436
700 g	-	Tin	H 0436-K

Universal Hardener, flammable

Universal Hardener for all NILOS cold cement.

Hardener	Unit	Item no.
1 x 40 g	Bottle	H 0050-H

* Other contents on request

For preparation of metal surfaces before bonding of rubber and metal by glueing with cold cement.

Primer SH, CHC-free, flammable

Unit *	Item no.
735 g Tin	H 1139

For degreasing of surfaces polluted by oil and grease, cleaning of brushes and removing of pollution by cement and vulcanizing solutions.

Cleaning fluid type B, CHC-free, flammable

Unit *	Item no.
500 ml Tin	H 0315

* Other contents on request

Materials for cold vulcanizing

Filler layer TOPGUM TS

Filler layer with bonding layer on both sides for repair of rubber conveyor belts. Also available in V quality (self-extinguishing quality).

Thickness	Width	Length *	Item no.
3 mm	25 mm	10.000 mm	H 0100
	50 mm		H 0101
	75 mm		H 0223
	100 mm		H 0224
	150 mm		H 0225
	200 mm		H 0226
	500 mm		H 0227

Cover layer TOPGUM TD, with sloped edges on both sides

Cover layer with bonding layer on one side for repair of rubber conveyor belts. Also available in V-Quality (self-extinguishing quality) and oil- and grease-resistant.

Thickness	Width	Length *	Item no.
2 mm	100 mm	10.000 mm	H 0102
3 mm			H 0230
5 mm			H 0231
2 mm	150 mm		H 0103
3 mm			H 0233
5 mm			H 0234
2 mm	200 mm		H 0104
3 mm			H 0236
5 mm			H 0237
2 mm	250 mm		H 0105
3 mm			H 0239
5 mm			H 0240
2 mm	500 mm		H 0106
3 mm			H 0242
5 mm			H 0243

Cover layer TOPGUM TDG, feathered edges both sides

Cover layer with bonding layer on one side with fabric reinforcement for repair of rubber conveyor belts. Also available in V-Quality (self-extinguishing quality) and oil- and grease-resistant.

Thickness	Width	Length *	Item no.
3 mm	100 mm	10.000 mm	H 0229-G
	150 mm		H 0230-G
	250 mm		H 0231-G
	300 mm		H 0232-G
	400 mm		H 0233-G
	500 mm		H 0234-G

* Other contents on request

Rubberized fabric with bonding layer on both sides for cold repair of fabric conveyor belts.

Gewebe TOPGUM TG, cured

Type	Width	Length *	Item no.
TG 200 EP 160	200 mm	10.000 mm	H 0250
TG 400 EP 160	400 mm		H 0432
TG 600 EP 160	600 mm		H 0251
TG 1200 EP 160	1.200 mm		H 0301

Hard cover with bonding layer on one side for repair and splicing of rubber conveyor belts. Also available in V-Quality (self-extinguishing quality).

Hard cover TH, edges without slopes

Thickness	Width	Length *	Item no.
2 mm	500 mm	10.000 mm	H 0108
3 mm			H 0246
4 mm			H 0247
5 mm			H 0248
6 mm			H 0249

Cold film TM

Thickness	Width	Length *	Item no.
1 mm	100 mm	10.000 mm	H 0253
	500 mm		H 0254

For the repair of cover plate and processing Rubber strips STG. With air deflfl ector.

Handextruder

Capacity	Weight	Item no.
1.150 W, 230 V, 50 Hz	approx. 6,9 kg	K 0651
1.150 W, 110 V, 50 Hz		K 0651-A
Round nozzle	-	K 0670
Flat nozzle		K 0671

Two component repair strips G+S

Type	Unit	Item no.
G (grey)	2 kg	H 0329-G
S (black)		H 0329-S
GS (grey + black)	2 x 2 kg	H 0329-GS
Cleaning mixture	2 kg	H 0331-V
apply accordingly TOPGUM TL-T60		H 0259

* Other contents on request

Pulley Lagging
Type RB

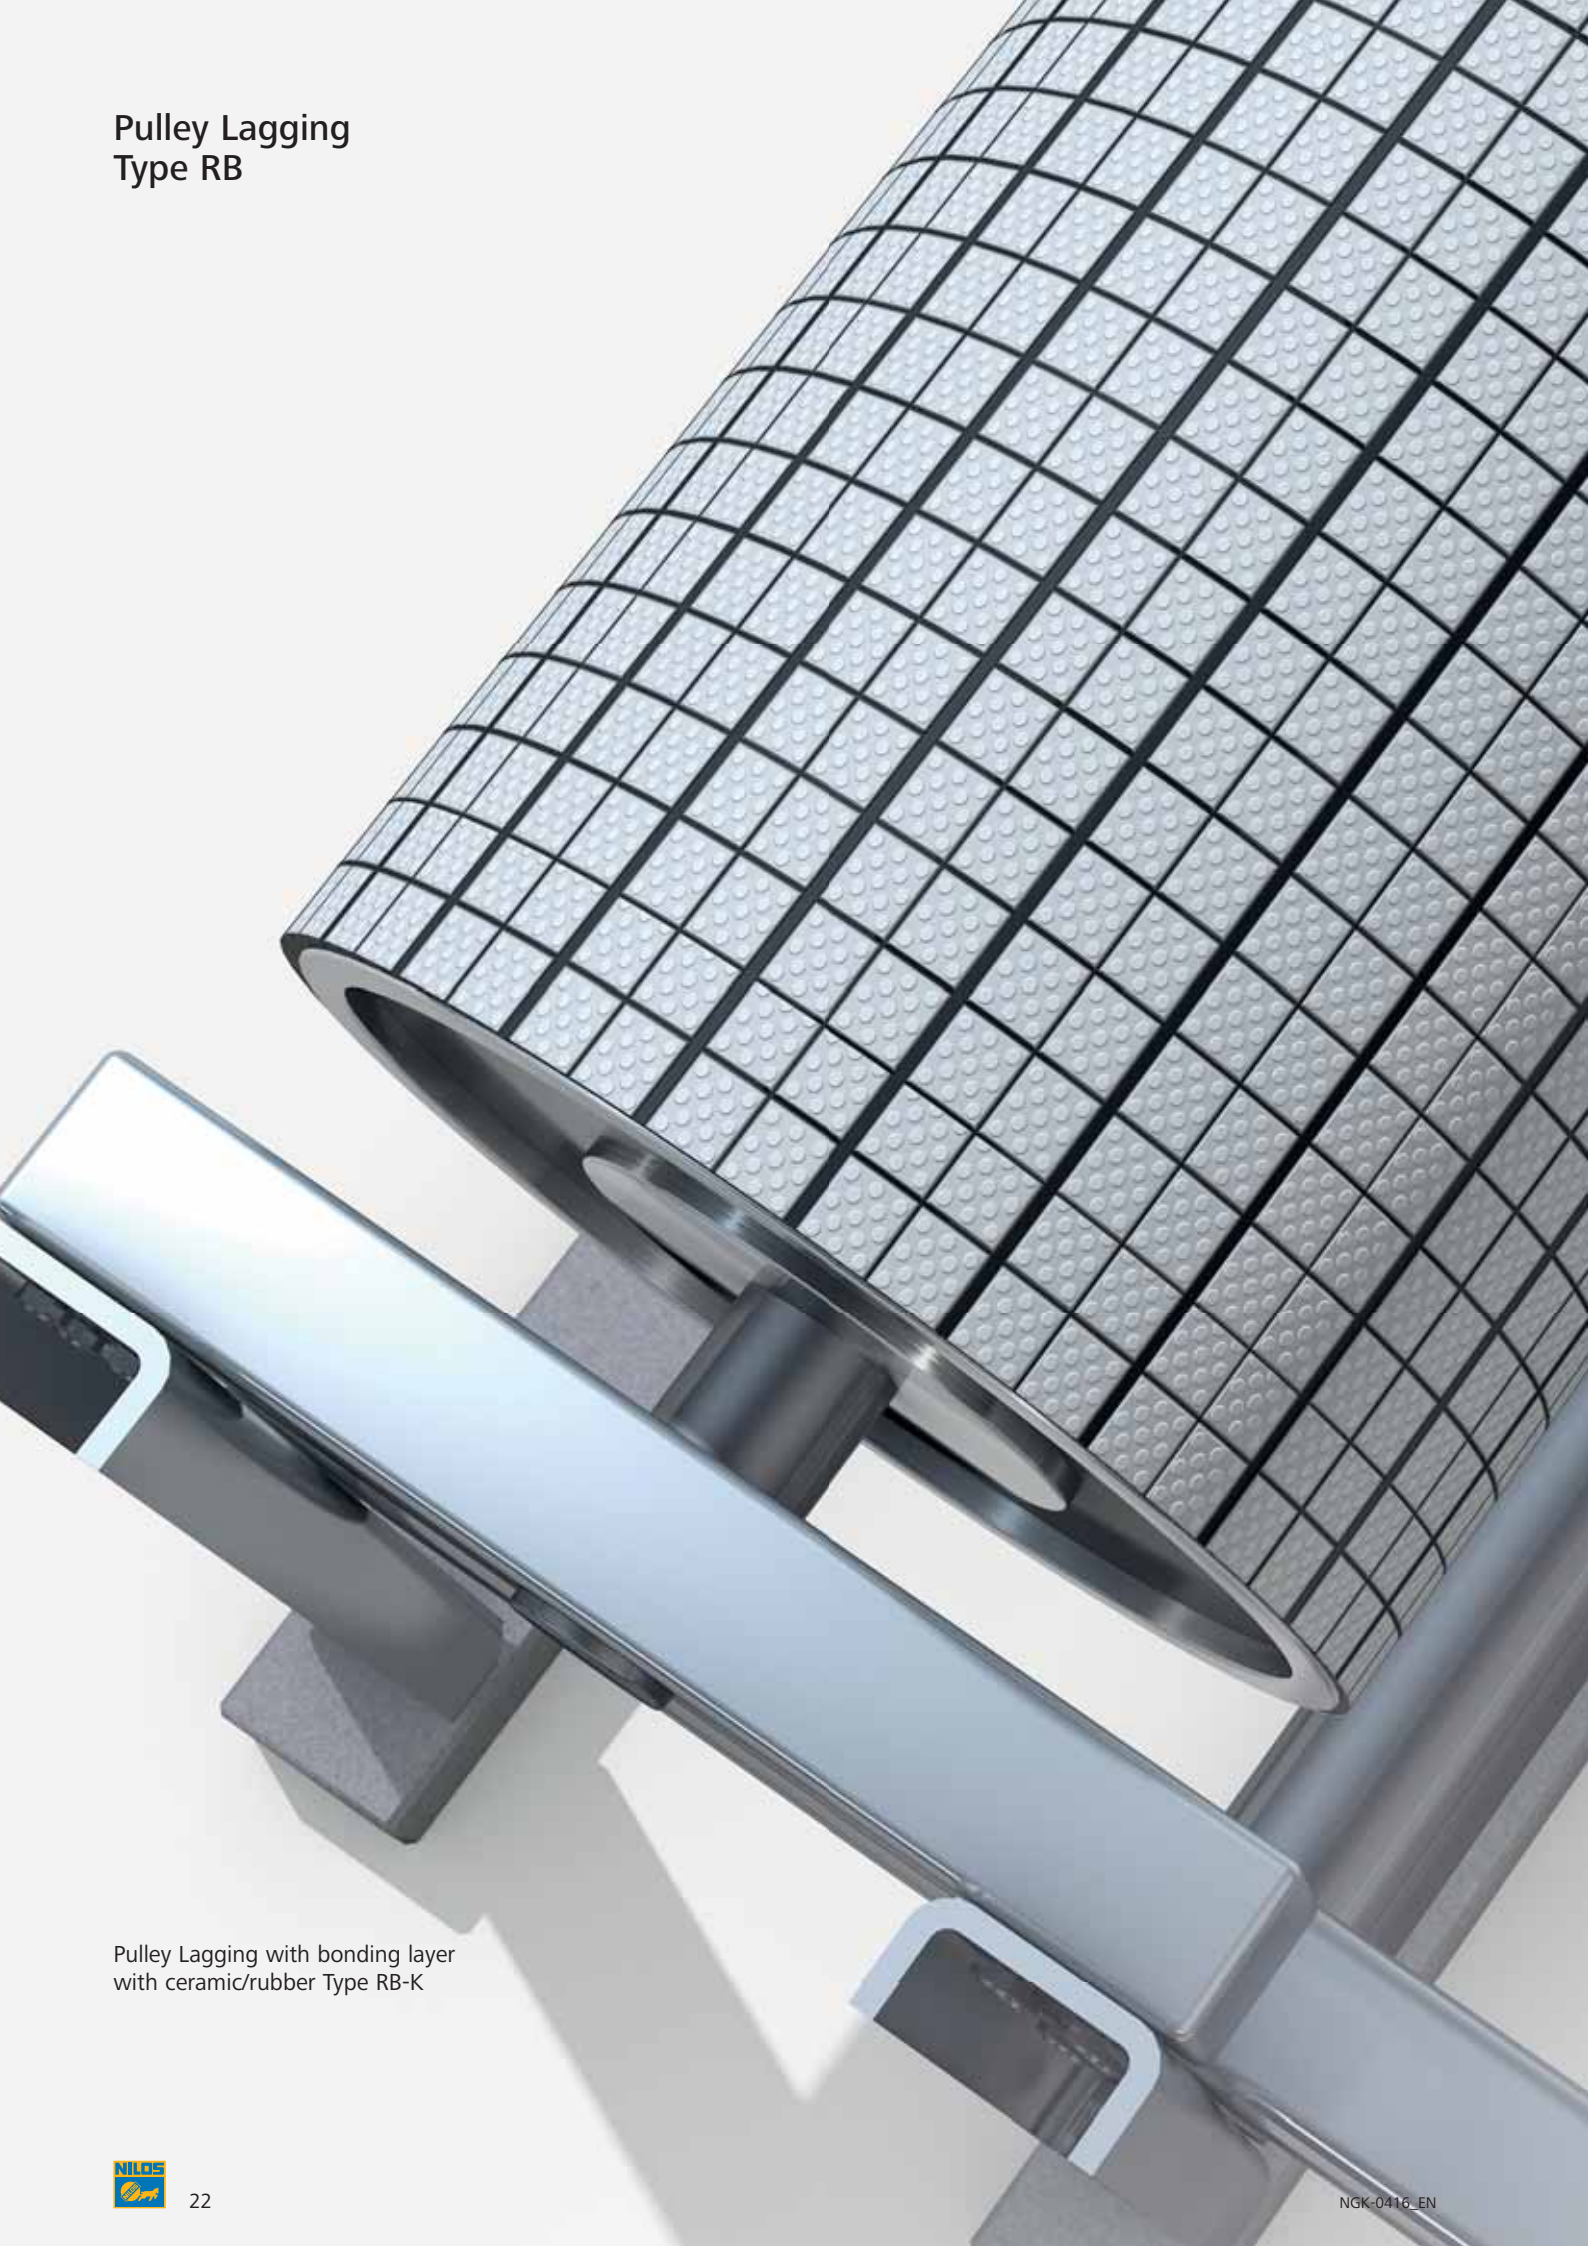

Pulley Lagging with bonding layer
with ceramic/rubber Type RB-K

NEW: TB60
THE GROOVED PULLEY LAGGING
everything is just right.

Wear resistant drum laggins made of rubber, plain or profiled, with or without adhesive layer in different qualities.

- Pulley lagging for increasing of the friction value between conveyor belt and pulley
- minimizing of the belt slip, and improvement of self-cleaning.
- protection of the pulley to prevent wearing off and corrosion
- Prevents material build-up

Quality *	Hardness DIN 53505	Abrasion DIN 53516	Elasticity DIN 53512	Colour	Properties
U60	60 ± 5 Sh° A	115 mm³	35%	black	very good resistance to abrasion
U70	70 ± 5 Sh° A	115 mm³	35%		good resistance to abrasion with high hardness
NEW: TB60	60 ± 5 Sh° A	120 mm³	30%		good resistance to abrasion
V	65 ± 5 Sh° A	200 mm³	30%		antistatic and extinguishing
NBR	65 ± 5 Sh° A	145 mm³	25%		oil- and grease-resistant

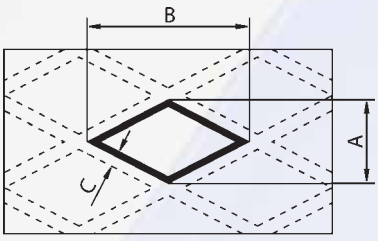

Diamond grooves

	Height A	Width B	Distance C	Depth
small	17 mm	33 mm	6 mm	3 mm
large	51 mm	88 mm	6 mm	4 mm

Our work instructions for rubber cylinder coatings see www.nilos.de

* Other qualities on request

Grooved Pulley Lagging
Type RB

Grooved Pulley Lagging RB - small diamond groove with bonding layer *

Thickness	Width	Length	Quality U60 Item no.	U70 Item no.	*NEW: TB60* Item no.	V Item no.	NBR Item no.
8 mm	2.000 mm	10.000 mm	T 1502-2	T 1520-2	T 1946-2	T 1556-2	T 1808-2
10 mm			T 1504-2	T 1522-2	T 1948-2	T 1558-2	T 1810-2

Grooved Pulley Lagging RB - large diamond groove with bonding layer *

Thickness	Width	Length	Quality U60 Item no.	U70 Item no.	*NEW: TB60* Item no.	V Item no.	NBR Item no.
12 mm	2.000 mm	10.000 mm	T 1505-3	T 1523-3	T 1950-3	T 1559-3	T 1811-3
15 mm			T 1506-3	T 1524-3	T 1953-3	T 1560-3	T 1812-3
20 mm			T 1507-3	T 1525-3	-	-	T 1813-3

Material for cold processing on pages 15 - 18

* Other demsions and qualities on request, also available without bonding layer

Pulley Lagging
Type RB, Type RB-K

Plain Pulley Lagging RB with bonding layer *

Thickness	Width	Length	Quality U60 Item no.	U70 Item no.	V Item no.	NBR Item no.
8 mm	2.000 mm	10.000 mm	T 1502-1	T 1520-1	T 1556-1	T 1808-1
10 mm			T 1504-1	T 1522-1	T 1558-1	T 1810-1
12 mm			T 1505-1	T 1523-1	T 1559-1	T 1811-1
15 mm			T 1506-1	T 1524-1	T 1560-1	T 1812-1
20 mm			T 1507-1	T 1525-1	-	T 1813-1

Pulley lagging made of ceramic/rubber for drive pulleys and idlers.

- elastic rubber base to reduce belt wear, with adhesive layer
- superior drive traction allows lower belt tension
- high wear-resistant
- very good self-cleaning effect
- easy bonding with TOPGUM

Thickness	Width	Length	Item no.
12 mm	204 mm	700 mm	T 1807
		900 mm	T 1808
		1.000 mm	T 1809
		1.100 mm	T 1810
		1.200 mm	T 1811
		1.300 mm	T 1812
		1.500 mm	T 1813
		1.700 mm	T 1814
		2.000 mm	T 1815
		2.500 mm	T 1816

Also available in oil and grease resistant and in self-extinguishing quality.

* Other demsions and qualities on request, also available without bonding layer

Reflex Lagging
Type RX

- all-purpose lagging / e.g. pulley or wear protection lagging
- protection against wear and corrosion
- prevents material build-up
- high resilience and elasticity
- reinforced on request

NEW: 40 ECO
THE REFLEX LAGGING

Quality	Hardness DIN 53505	Abrasion DIN 53516	Elasticity DIN 53512	Colour	Properties
35	35 ± 5 Sh° A	220 mm³	70%	coloured **	especially soft with exceptionally high elasticity
NEW: 40 ECO	40 ± 5 Sh° A	< 200 mm³	40%	black	with well-balanced and physical properties
45	45 ± 5 Sh° A	< 200 mm³	65%	coloured **	soft with exceptionally high elasticity
V	60 ± 5 Sh° A	130 mm³	35%	black	antistatic and estinguishing
NBR	40 ± 5 Sh° A	180 mm³	35%		oil- and grease-resistant

Reflex Lagging RX with bonding layer *

Thickness	Width	Length	Quality 35 Item no.	*NEW: 40 ECO* Item no.	45 Item no.	V Item no.	NBR Item no.
8 mm	2.000 mm	10.000 mm	T 1592	T 2005	T 1610	T 1646	T 1664
10 mm			T 1593	T 2010	T 1611	T 1647	T 1665
12 mm			T 1594	T 2012	T 1612	T 1648	T 1666
15 mm			T 1595	T 2015	T 1613	T 1649	T 1667
20 mm			T 1596	-	T 1614	T 1650	T 1668

* Other materials and qualities on request, also available without bonding layer
** beige, yellow, green, red, blue and black

NEW: VS60
THE WEAR PROTECTION LAGGING

- with or without bonding layer
- universal, weatherproof, Wear Protection Lagging
- protection against noise, wear and corrosion
- prevents material build-up

Quality	Hardness DIN 53505	Abrasion DIN 53516	Elasticity DIN 53512	Colour	Properties
NEW: VS60	60 ± 5 Sh° A	120 mm³	30%	black	for a wide range of applications
AB	60 ± 5 Sh° A	115 mm³	35%		for a wide range of applications
A	65 ± 5 Sh° A	80 mm³	40%		high resistance to abrasion
V	60 ± 5 Sh° A	130 mm³	35%		antistatic and extinguishing
NBR	65 ± 5 Sh° A	145 mm³	25%		oil- and grease-resistant

Wear Protection Lagging RV with bonding layer *

Thickness	Width	Length	Quality *NEW: VS60* Item no.	AB Item no.	A Item no.	V Item no.	NBR Item no.
8 mm	2.000 mm	10.000 mm	T 1966-1	T 1445	T 1682	T 1772	T 1867
10 mm			T 1968-1	T 1446	T 1683	T 1773	T 1868
12 mm			T 1970-1	T 1447	T 1684	T 1774	T 1869
15 mm			T 1973-1	T 1448	T 1685	T 1775	T 1870
20 mm			-	T 1489	T 1686	T 1776	T 1871

Material for cold processing on pages 15 - 18

* Other materials, colours and qualities on request, also available without bonding layer

Ceramics Wear Protection Lagging Type RK

Ceramic Wear Protection Lagging made for use under hard operational conditions.

- ceramic elements made of alumina oxide (Al_2O_3 = corundu) vulcanized into a shock absorbant rubber mat.
- cold bonding of segment plates on steel surfaces by additional bonding layer on the bottom side of rubber plates
- optimal sliding properties
- water-repelling
- high resistance against abrasion

Application

- in mining, e.g. in coal preparation
- in glass industry
- chutes, slides, even in case of sliding dry friction
- in case of highly corrosive goods

Ceramics Wear Protection Lagging RK with bonding layer

Thickness x Width x Length *	Ceramics (T x W x L)	Rubber-Thickness	Art-Nr.
3,5 x 500 x 500 mm	1,5 x 10 x 10 mm	2 mm	T 1884
8 x 500 x 500 mm	4 x 20 x 20 mm	4 mm	T 1830
10 x 500 x 500 mm	6 x 20 x 20 mm	4 mm	T 1887
14 x 500 x 500 mm	10 x 20 x 20 mm	4 mm	T 1888

Material for cold processing on pages 15 - 18

* Other contents on request

Wear Protection Lagging
Type RM

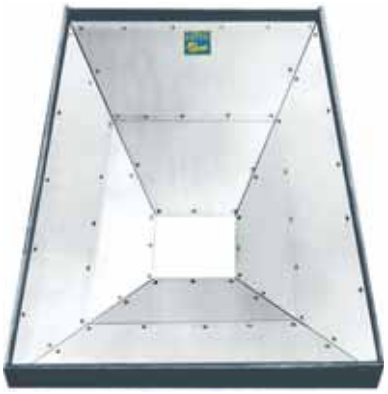

Wear Protection Lagging for lining and protection against noise, abrasion and corrosion and prevention from sticking on of conveyed goods.

Application
- coal mining
- in case of damp or watery conveyed goods
- chutes
- slides
- in case of high corrosive goods

Properties
- high wear protection
- optimum protection from build-up bulk materials
- optimal sliding, even in case of temperatures under 0° C
- resistant against chemicals
- very good noise reducing properties
- UV protected

Quality	1000
Specific weight	0,93 g/cm²
Softening temperature	133 - 135 °C
Notch impact strength	210 kJ/m²
Molecular weight	approx. 3,5 Mio.
Colour	natural white

Mechanical fi xing with
- screws
- cotter pin
- clinch

Possible handling
- saw
- rotating
- shaping
- milling
- boring
- perforating
- welding

Wear Protection Lagging RM *

Thickness	Width	Length	Item no.
8 mm	1.000 mm	1.000 mm	T 1186
10 mm			T 1187
12 mm			T 1188
15 mm			T 1189
20 mm			T 1190

Wear Protection Lagging RM *

Thickness	Width	Length	Item no.
8 mm	1.000 mm	2.000 mm	T 1174
10 mm			T 1175
12 mm			T 1192
15 mm			T 1193
20 mm			T 1176

Maximum manufacturing sizes

Width	Length
1.000 mm	4.000 mm
2.000 mm	4.000 mm
	6.000 mm
1.000 mm	8.000 mm

* Other contents on request, please note our max. manufacturing sizes

PU-Polyurethane Wear Protection Lagging Type RP

Application
- in case of damp or watery conveyed goods
- chutes, slides; even in case of sliding dry friction
- extremely high temperatues
- extremely corrosive goods

Quality

	Hardness DIN 53505	Abrasion DIN 53516	Elasticity DIN 53512	Colour
65	65 ± 5 Sh° A	44 mm³	62%	blue
85	80 ± 5 Sh° A	31 mm³	51%	

Properties
- all-purpose wear protection
- weatherproof
- protection against noise, wearing and corrosion
- prevents material build-up
- highy resistant against notches
- oil- and grease-resistant
- temperature resistant up to +90°

PU-Polyurethane Wear Protection Lagging RP with bonding layer *

Thickness	Width	Length	Quality 65 Item no.	Quality 85 Item no.
8 mm	2.000 mm	1.000 mm	T 1841	T 1846
10 mm			T 1842	T 1847
12 mm			T 1843	T 1848

Material for cold processing on pages 15 - 18

* Other contents on request, also available without bonding layer

Standard Scraper Rubber
Type AN, AV, ANBR und AH

Standard Scraper Rubber

High abrasion resistant scraper rubber and Lateral scraper rubber for all applications.

Type AN
Standard scraper for a wide variety of applications.

Type AV
Antistatic and extinguishing.

Type ANBR
Oil- and grease-resistant.

Type AH
Standard scraper with high shore hardness.

Quality	Hardness DIN 53505	Abrasion DIN 53516	Elasticity DIN 53512	Colour	Properties
AN	60 ± 5 Sh° A	115 mm³	35%	black	wide range of applications
AV	70 ± 5 Sh° A	125 mm³	30%		antistatic and extinguishing
ANBR	65 ± 5 Sh° A	145 mm³	25%		oil- and grease-resistant
AH	80 ± 5 Sh° A	150 mm³	25%		with high shore hardness

Thickness	Width	Length *	AN * Item no.	AV * Item no.	ANBR * Item no.	AH * Item no.
10 mm	100 mm	10.000 mm	T 0953	T 0965	T 0977	T 1019
15 mm			T 0954	T 0966	T 0978	T 1020
20 mm			T 0955	T 0967	T 0979	T 1021
10 mm	125 mm		T 0956	T 0968	T 0980	T 1022
15 mm			T 0957	T 0969	T 0981	T 1023
20 mm			T 0958	T 0970	T 0982	T 1024
10 mm	150 mm		T 0959	T 0971	T 0983	T 1025
15 mm			T 0960	T 0972	T 0984	T 1026
20 mm			T 0961	T 0973	T 0985	T 1027
15 mm	200 mm		T 0962	T 0974	T 0986	T 1028
20 mm			T 0963	T 0975	T 0987	T 1029

* Other contents on request

Combination Scraper Rubber
Type AKN, AKV und AKNBR

Combination Scraper Rubber with signal layer.

High abrasion resistant scraper rubber and Lateral scraper rubber for all applications.

Type AKN
Combination scraper (3-layers) for normal applications.

Type AKV
Combination scraper (3-layers), antistatic and extinguishing.

Type AKNBR
Combination scraper (3-layers), oil- and grease-resistant.

Quality	Hardness DIN 53505	Abrasion DIN 53516	Elasticity DIN 53512	Colour	Properties
AKN	60 ± 5 Sh° A	115 mm³	35%	black	wide range of applications
	50 ± 5 Sh° A	220 mm³	75%	coloured **	
	60 ± 5 Sh° A	115 mm³	35%	black	
AKV	70 ± 5 Sh° A	125 mm³	30%	black	antistatic and extinguishing
	55 ± 5 Sh° A	270 mm³	40%	coloured **	
	70 ± 5 Sh° A	125 mm³	30%	black	
AKNBR	65 ± 5 Sh° A	145 mm³	25%	black	oil- and grease-resistant
	40 ± 5 Sh° A	180 mm³	35%	coloured **	
	65 ± 5 Sh° A	145 mm³	25%	black	

Thickness	Width	Length	AKN * Item no.	AKV * Item no.	AKNBR * Item no.
15 mm	100 mm	10.000 mm	T 1054	T 1066	T 1078
20 mm			T 1055	T 1067	T 1079
30 mm			T 1056	T 1068	T 1080
15 mm	125 mm		T 1057	T 1069	T 1081
20 mm			T 1058	T 1070	T 1082
30 mm			T 1059	T 1071	T 1083
15 mm	150 mm		T 1060	T 1072	T 1084
20 mm			T 1061	T 1073	T 1085
30 mm			T 1062	T 1074	T 1086
15 mm	200 mm		T 1063	T 1075	T 1087
20 mm			T 1064	T 1076	T 1088
30 mm			T 1065	T 1077	T 1089

* Other contents on request
** red, green

Lateral Scraper Rubber
Type AXN, AXV und AXNBR

Lateral scraper rubber

High abrasion lateral scraper rubber for all applications.

Type AXN
Lateral scraper rubber made of soft rubber with high elasticity.

Type AXV
Lateral scraper rubber, antistatic and extinguishing, with high elasticity.

Type AXNBR
Reflex scraper, oil-resistant with high elasticity.

Quality	Hardness DIN 53505	Abrasion DIN 53516	Elasticity DIN 53512	Colour	Properties
AXN	45 ± 5 Sh° A	220 mm³	65%	black	soft, high elasticity
AXV	55 ± 5 Sh° A	270 mm³	40%		antistatic and extinguishing, high elasticity
AXNBR	40 ± 5 Sh° A	180 mm³	35%		oil- and grease-resistant, high elasticity

Thickness	Width	Length	AXN * Item no.	AXV * Item no.	AXNBR * Item no.
10 mm	100 mm	10.000 mm	T 0989	T 0999	T 1009
15 mm			T 0990	T 1000	T 1010
20 mm			T 0991	T 1001	T 1011
10 mm	125 mm		T 0992	T 1002	T 1012
15 mm			T 0993	T 1003	T 1013
20 mm			T 0994	T 1004	T 1014
10 mm	150 mm		T 0995	T 1005	T 1015
15 mm			T 0996	T 1006	T 1016
20 mm			T 0997	T 1007	T 1017
15 mm	200 mm		T 0701	T 1182	T 1184
20 mm			T 0702	T 1191	T 1185

Material for cold processing on pages 15 - 18

* Other contents on request

Impact Aprons

Toothed profile

- special production, dimensions and rubber quality on customer request
- changeable for middle zone area
- easy mounting to any type of funnel wall

Impact aprons

Completion	Item no.
with toothed profile	T 1400
with flat profile	T 1401

Conveyor belts

Conveyor belts

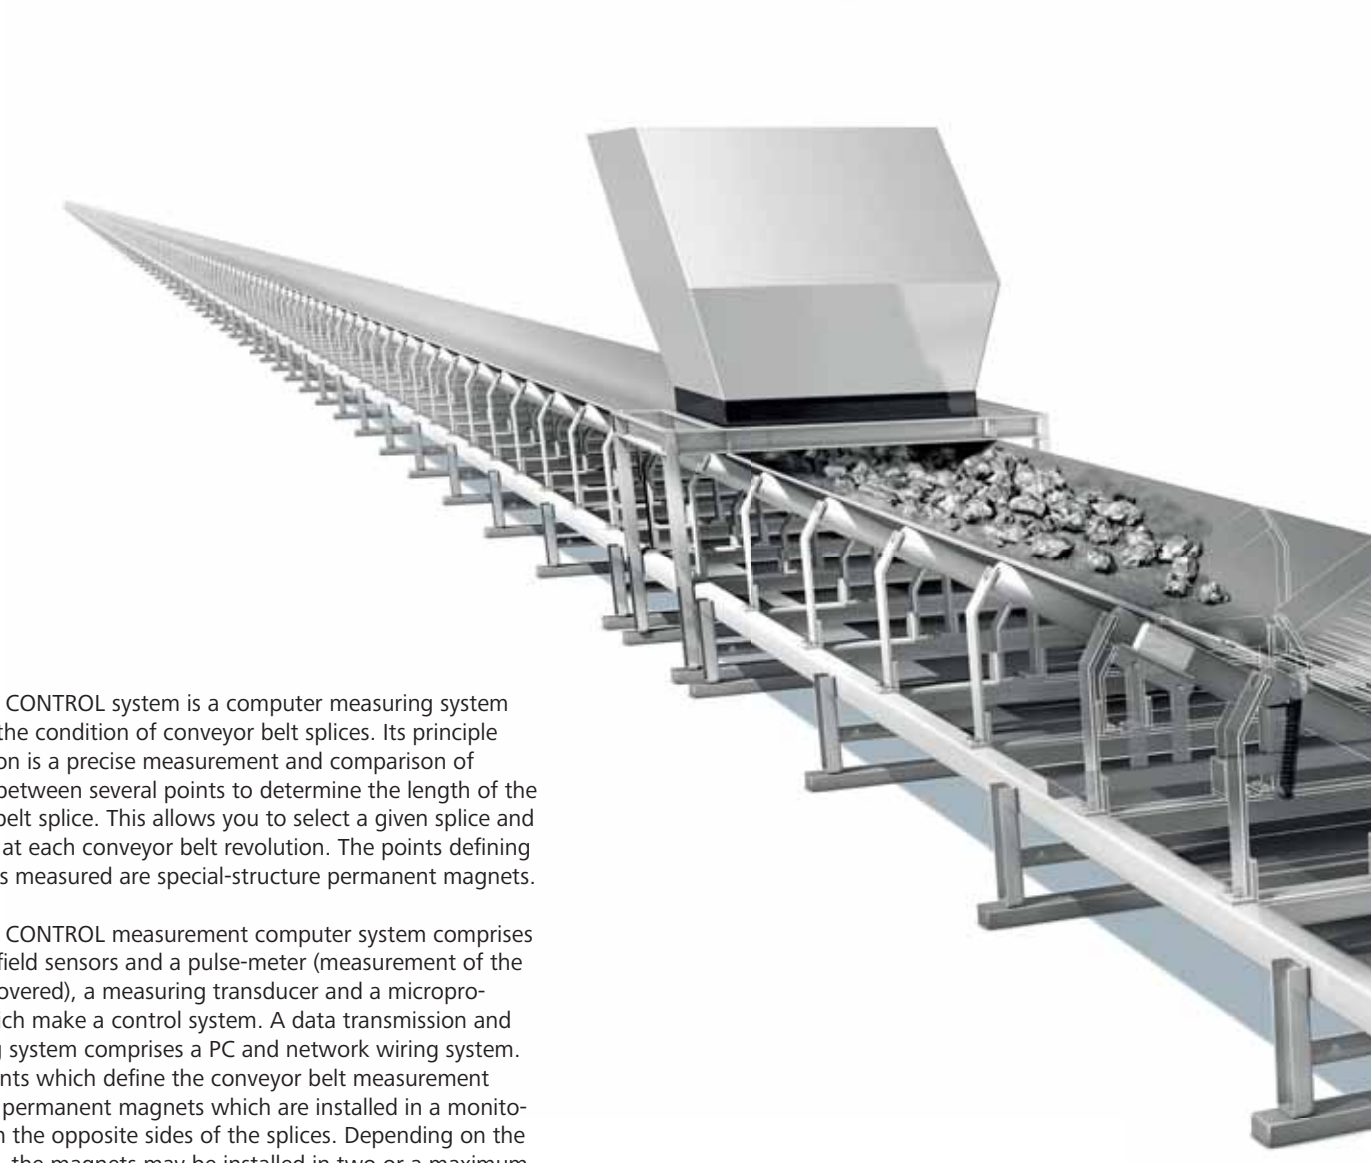

The CORD CONTROL system is a computer measuring system analysing the condition of conveyor belt splices. Its principle of operation is a precise measurement and comparison of distances between several points to determine the length of the conveyor belt splice. This allows you to select a given splice and monitor it at each conveyor belt revolution. The points defining the lengths measured are special-structure permanent magnets.

The CORD CONTROL measurement computer system comprises magnetic field sensors and a pulse-meter (measurement of the distance covered), a measuring transducer and a microprocessor which make a control system. A data transmission and processing system comprises a PC and network wiring system. The elements which define the conveyor belt measurement points are permanent magnets which are installed in a monitored belt on the opposite sides of the splices. Depending on the belt width, the magnets may be installed in two or a maximum of four places. This also limits the number of magnetic field sensors; there may be 2-4 of them. The magnets installed are of 10 mm diameter and height, thus they can be installed in any belt thicker than 12 mm.

CORD CONTROL by Coal Control

Available types and properties

- Fabric conveyor belts (EP and EE)
- Steel Cord conveyor belts (ST)
- heat resistant conveyor belts up to 200°C
- oil and grease resistant conveyor belts
- FRAS conveyor belts (self-extinguishing quality, antistatic)
- cross stabilized conveyor belts
- chevron conveyor belts
- cleated sidewall conveyor belts (elevator belts)

Standards

DIN	(German institute for standardization) (Available qualities: OR, MOR, X, Y, W, Z, K und S *)
BS	(British Standards)
NF	(Norme Francaise)
RMA	(Rubber Manufacturers Association)
JIS	(Japanese Industrial Standards)
AS	(Australian Standards)
SBS	(South African Standards)

NILOS supplies conveyor belts customized to individual application. Conveyor belts of extremely varied types have proved their suitability for use in all forms of moving goods and materials. Careful selection of suitable materials and fittings ensure a long service life and economic operation of the conveyor belt involved. We can recommend the suitable form of conveyor belt for each individual application in the handling of granulated and bulk materials whether in mining, in the chemicals or plastics industries, for loading and unloading vehicles, or to move gravel and rock.

Depending on the requirements and intended application, we can offer fabric and steel cord conveyor belts in a great variety of grades, ratings and surface properties.

Since we keep a suitable quantity of current types of conveyor belts in stock, we can ensure a high degree of availability of conveyor belts for our customers as well as short delivery times.

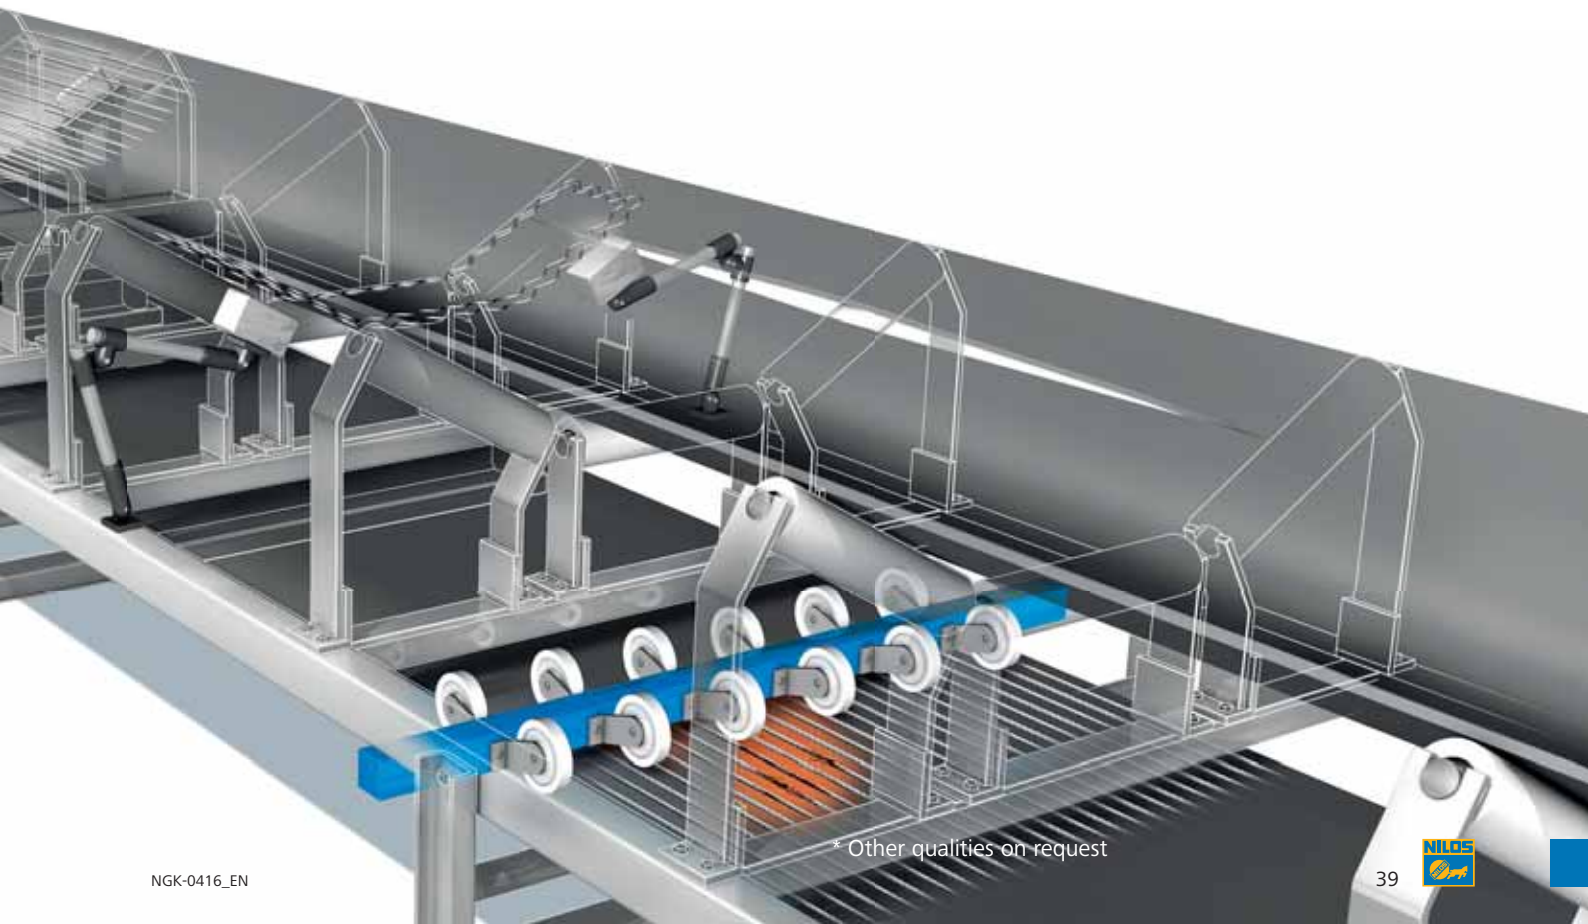

* Other qualities on request

Cleats for bonding on conveyor belts

Cleats are available in rubber quality **standard** or **oil- and grease-resistant**, and also with and without fabric reinforcement.

T cleat	Height	Item no.
T 20	20 mm	T 1408
T 35	35 mm	T 1411
T 40	40 mm	T 14115
T 60	60 mm	T 14125
T 80	80 mm	T 14135
T 100	100 mm	T 14145
T 110	110 mm	T 1415



C cleat	Height	Item no.
C 35	35 mm	T 1417 *
C 60	60 mm	T 14195 *
C 80	80 mm	T 14205 *
C 110	110 mm	T 1421 *



TC cleat	Height	Item no.
TC 110	125 mm	T 1425
TC 190	180 mm	T 1428



* Other dimensions and spezifications on request

Sidewalls for bonding on conveyor belts

Sidewalls are available in rubber quality **standard** or **oil- and grease-resistant**, and also with and without fabric reinforcement.

Sidewall	Height	Item no.
K 40	40 mm	T 1430
K 60	60 mm	T 1431
K 80	80 mm	T 1432

Sidewall	Height	Item no.
K 100	100 mm	T 1433
K 120	120 mm	T 1434
K 140	140 mm	T 1435
K 160	160 mm	T 1436

Fabric reinforced

Sidewall	Height	Item no.
K 250	250 mm	T 1439-EP
K 300	300 mm	T 1440-EP

Material for cold processing on pages 15 - 18

* Other dimensions and specifications on request

Rubber Wear Protection Clamping Bars

Against noise and wear

Environmentally friendly and low maintenance installations implicate tasks that can be solved trouble-free and in a relatively easy way by using the tried and tested wear resistant rubber material. The basic properties of rubber – elasticity and abrasion resistance – enable highly efficient abatement of both noise and wear. If used correctly optimum lifetime and efficiency is guaranteed. The all-purpose rubber wear protection clamping bars bring up more possible fields of application when used in composition with NILOS wear protection coatings or NILOS screen decks.

Rubber Wear Protection Clamping Bars

Rubber wear protection clamping bars with metal inserts (see chart). While the types RU have rounded wear surfaces to ensure better guiding and protection of the conveyor belt, the types EU, EJ and ED are built with rectangular cross-sections so that they can be used side-by-side to cover wider areas. The fastening is carried out via T-bolts DIN 186 for types RU and EU; for type EJ, whose profiles bear strains of up to 12,000 kp it is carried out via special bolts.

While the aforementioned types can be fastened anywhere by clamps, the type ED 16 can also be fastened from the top in places difficult to access, as there are three precast longitudinal bores. These longitudinal bores are in intervals of 290 mm and 65 mm from the strip's edges.

Length of supply: 1.000 mm

	Type	Width x Height	kg	Item no.	Srew in mm	Item no.
1	RU 10	40 x 35 mm	2,0	T 0779		
	RU 16	60 x 47 mm	4,2	T 0780	M 10 x 30	T 0796
2	EU 10	100 x 35 mm	4,4	T 0781	M 10 x 60	T 0797
	EU 16	100 x 50 mm	6,6	T 0782	M 16 x 30	T 0798
3	EF 10	40 x 40 mm	3,7	T 0784	M 16 x 50	T 0799
	EF 16	60 x 60 mm	7,6	T 0785	M 16 x 80	T 0800
					M 20 x 80	T 0800

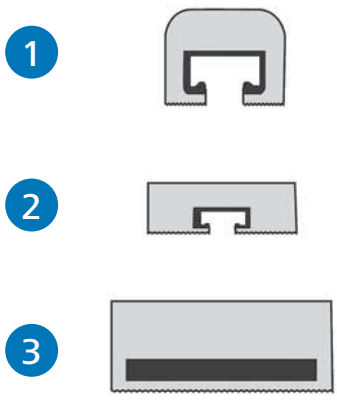

Conveyor feed point without impact bar

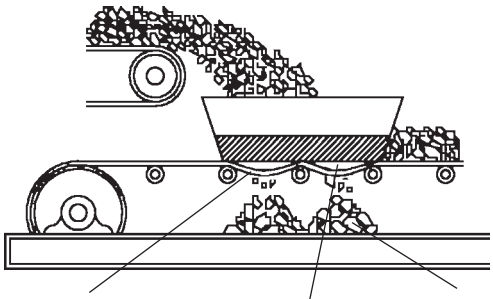

Conveyor feed point with impact bar

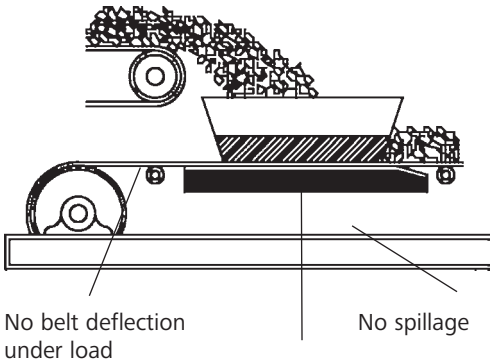

Application:

The weight of the material can cause deflection or sagging between the roller sets at the conveyor feed point. The use of rubber skirts produces a gap between the conveyed material and the rubber guide, which can cause spillage.

The consequences are:

- sticking of the material
- blocked rollers
- belt wear and damage
- belt tracking problems

Belt support at the loading area not only prevents material spillage but also increases the service life of the belt.

Characteristics:

- easy installation
- high impact and bending strength
- sliding belt Lateral
- abrasion-resistant
- shock-absorbing

Design:

- aluminum profile for quick installation with T-bolts
- shock-absorbing rubber base (core)
- surface made of polyethylene ensures low friction

Impact Bars Length 1.220 mm

Thickness x Width *	Item-no.
100 x 55 mm	T 0901
100 x 75 mm	T 0904
100 x 100 mm	T 0905

Fixing

Screw	Item-no.
M 12 x 40 mm	EK 5200042
M 16 x 40 mm	EK 5200047

- recommendation: 4 bolts per impact bar
- 1 set screws includes bolts, grommet and nute

* Other contents on request

Jet-Streamer,
Pneumatic Scraper Systems

Fiels of application
- contact-free cleaning of cleated and sidewall belts where conventional stripper systems cannot be used
- contact-free cleaning of smooth conveyor belt surfaces
- contact-free cleaning of wet and/or slightly adhesive, tacky materials such as e. g. sand, gypsum, slags, fine ores, etc.
- non-contact cleaning of max. 2 transfer points

Properties
- long life service
- minimum maintenance
- protection of the conveyor belt surface
- quick and simple installation
- low space requirements at the conveyor belt (only approx. 100 mm clearance under the conveyor belt required)
- available for belt widths up to 3.000 mm

Scope of supply Jet Streamer
The Jet Streamer consists of the following components:
- high-pressure radial fan
- nozzle pipe
- throttle flap
- installation materials with tube
- manual control (automatic control is available)

Properties of manual control
- splash-proof housing
- integrated protective motor switch (matching the motor power rating)
- integrated manually-switched star/delta switch (automatic control is available)

Properties of automatic control
- splash-proof housing
- integrated protective motor switch (matching the motor power rating)
- fully automatic star/delta switch, upon pressing the button once the start-up phase of the motor is automatically switched to full load
- integrated coil temperature monitor for the motor with automatic shut-off on overheating

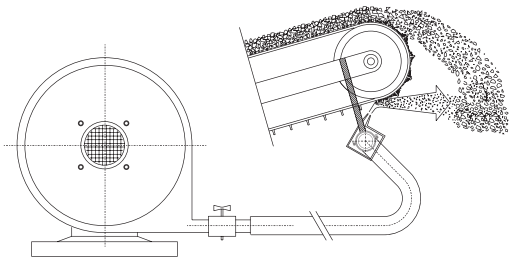

Jet Streamer for smooth conveyor belts and conveyor belts with cleats *

Belt width	Height cleatprofile	Type	Item no.
500 mm	0 - 15 mm	JS 500/15	01266
600 - 700 mm		JS 650/15	01267
800 mm		JS 800/15	01268
1.000 mm		JS 1000/15	01269
1.200 mm		JS 1200/15	01270
1.400 mm		JS 1400/15	01271

Jet Streamer for conveyor belts with cleats *

Belt width	Height cleatprofile	Type	Item no.
500 mm	16 - 30 mm	JS 500/30	01273
600 - 700 mm		JS 650/30	01274
800 mm		JS 800/30	01275
1.000 mm		JS 1000/30	01276
1.200 mm		JS 1200/30	01277
1.400 mm		JS 1400/30	01278

* Other contents on request

NILOS Rollers
the *NEW* roller brand

NILOS GmbH & Co. KG
Reisholzstr. 15
40721 Hilden € Germany
Phone: +49 2103 951 - 0
Fax: +49 2103 951 - 209
info@nilos.de
www.nilos.de

Basic

Control Box + Basic Software

Basic Software for your Laptop

- documentation and storage of the complete splicing process for up to 16 plates by using 4 control boxes
- diagram display of the complete splice data
- PDF file of the splice report for print-out
- offers transparency of the vulcanizing process
- data files for vulcanizing equipment
- data bank management of splicing equipment, splice material and splice parameter
- Windows based

SPLICE-WATCH

Coal Control

SPLICE-WATCH

NILOS recommends TOUGHBOOK Panasonic

SPLICE-WATCH Control Box

- electronic temperature control for up to 4 plates
- LED display for heating temperature and vulcanizing/cure time
- data logging of vulcanizing temperature, operating pressure, ambient temperature, humidity, date and time
- RF-ID (user identification)
- USB interface for data transmission

Benefit from the advantage of the NILOS Software and manage your splice wherever you want.

Professional

Control Box + Professional Software for using a Laptop or Tablet

Professional Software for using a Laptop or Tablet

- live monitoring during the vulcanizing process
- documentation and storage of the complete splicing process for up to 16 plates by using 4 control boxes
- diagram display of the complete splice data
- PDF file of the splice report for print-out
- offers transparency of the vulcanizing process
- data files for vulcanizing equipment
- data bank management of splicing equipment, splice material and splice parameter
- Windows based
- WIFI Communication

Control Box + Professional Software for using a Tablet

- extremly bright 10.1“ Touchscreen LCD with Dual Touch and Circular Polarizer
- Intel® Core™ i5-5300U vPro-Processor
- lightweight form factor - weighing only 1,1 kg
- dual hot swappable batteries providing up to 13 hours battery life
- shock-proof, waterproof and dust proof (IP65)
- USB, LAN and serial port (depends on model)
- 3MP camera with autofocus and LED (optional)
- GPS (optional)
- RF-ID (user identification - optional)
- Bluetooth
- Windows based
- WIFI Communication

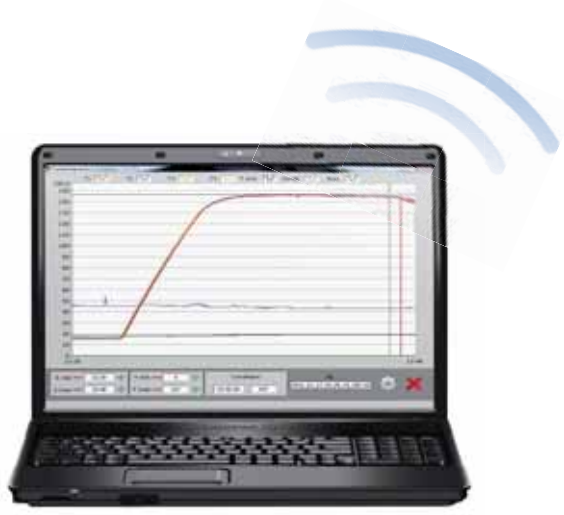

Special Vulcanizing Press VULCOFRAME

Vulcanizing press for hard work

- vulcanizing press for splicing of steel cord and fabric belts
- the "Two-Piece" vulcanizing press
- solid framework
- uniform pressure by means of pressure bags
- integrated water cooling system
- different heating systems available
- robust traction bolts for mechanical or hydraulic operation
- electronic temperature and pressure monitoring
- optional monitoring and registration of the whole vulcanizing process
- quick assembly and disassembly
- quick cooling due to water cooling
- protected pressure-bags and heating plates
- centralized connections for electricity and pressure system
- reduced downtimes
- compared to removable presses:
  - less spare parts required
  - longer service life

The vulcanizing press VULCOFRAME is available for the following belt widths:

- 1.600 mm
- 2.000 mm
- 2.200 mm
- 2.400 mm
- 2.800 mm

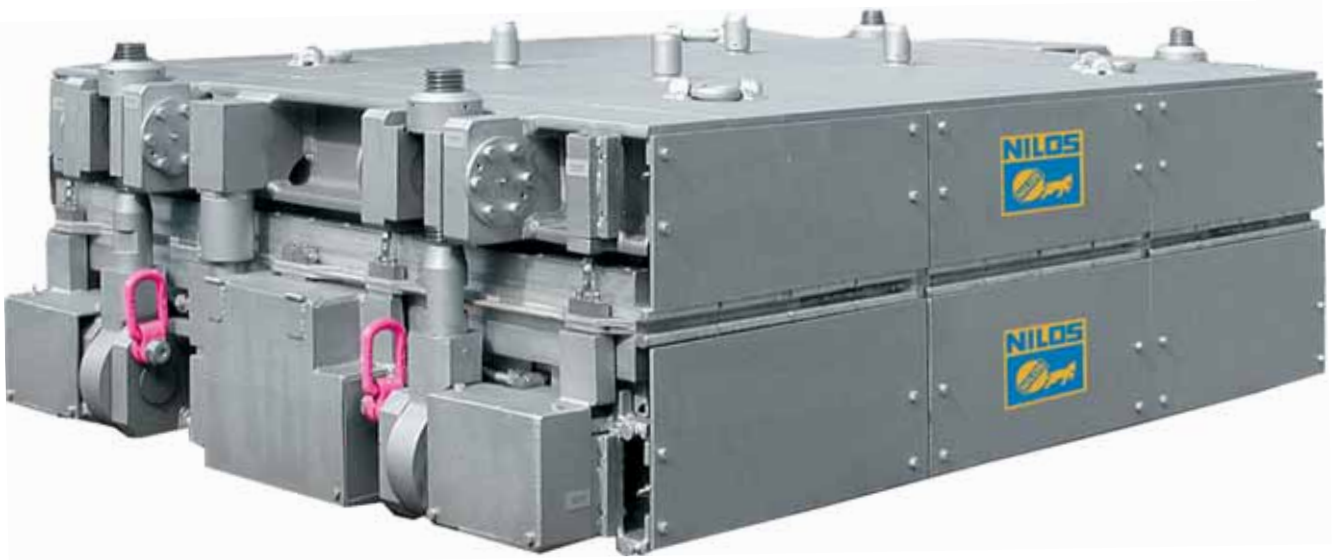

Vulcanizing Repair Press
C-Clamp

Hydraulic and mechanical C-clamp for spot-, edge-, and rip-repairs

- C-clamp of high-alloy aluminum of torsion-stiff, solid welded construction
- highest bending resistance at minimum weight
- made for the following pressure power: 3 t and 6 t
- for repairing from the belt edge to the belt middle
- great depth up to the belt center, press overhang available: 200, 400, 600, 800, 1.000 and 1.200 mm
- the specific pressure achieved depends on the number of c-clamps used

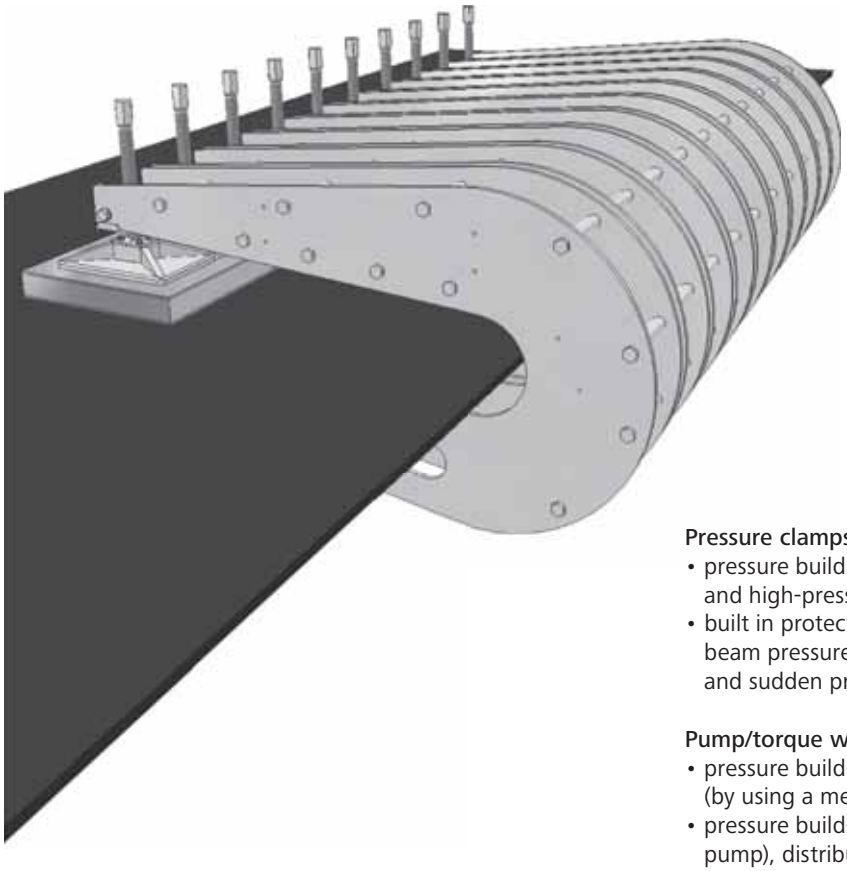

Pressure clamps with hydraulic-cylinders

- pressure build up by means of hydraulic light metal cylinders and high-pressure pump (manual or electric)
- built in protection against hose breakage (optional), the cross beam pressure is maintained in the event of hose breakage and sudden pressure drop

Pump/torque wrench

- pressure build-up by torque wrench with pressure spindles (by using a mechnical torque wrench)
- pressure build-up with hand pump (optionally motor-driven pump), distributor, high-pressure hoses and hydraulic oil

Heating plates

- in good frame construction, made of high-quality corrosion-resistant aluminium alloy
- a minimum size of 300 x 300 mm is available for spot repairs
- available for longitudinal repairs in any required length and a width of 500 mm
- specially developed heating systems and profile reinforcements guarantee optimum pressure and temperature distribution
- available with either air or water cooling
- robust and flush final electrical connections (bis 500 V, 6 pol) to ensure safe operation.

mechanical hydraulic

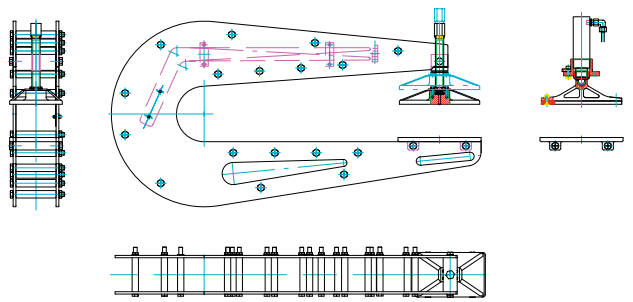

Electronic control box

- with cable connections (the configuration of the control box required depends on the number and dimensions of heating plates)
- electronic control with digital display of setpoint and actual temperatures

Longitudinal Slit Repair Presses HYDRAULIC

Longitudinal slit repair press
- for hot splicing of longitudinal rips, punctures and damage to belt edges
- uniform pressure over the entire repair length via hydraulic aluminium cylinders
- depending on the width of the heating plates and surface pressure, cross beams are provided with 2-3 shiftable pressure elements
- for use of belt width up to 3.200 mm
- cross beam repair vulcanizing presses are designed to customer's requirements on request
- depending on the model and the size of the heating plates, cross beam repair vulcanizing presses can be used for spot and rip repairs

Repair cross beams with hydraulic cylinders
- the pressure systems can be moved over the total width of the belt

Pump
with hydraulic cross beams:
- hand pump (optionally motor-driven pump)
- distributor
- high-pressure hoses
- hydraulic oil

Heating plates
- special electrical connections
- regulation via thermosensor PT 100
- shape: rectangular 90°
- available for longitudinal repairs in any required length from min. width of 500 mm
- the number of movable beams required depends on the length of the heating plate and the required specific surface pressure

Electronic control box
- with connecting cables (number and type depends on the number and size of the heating plates)
- digital temperature display

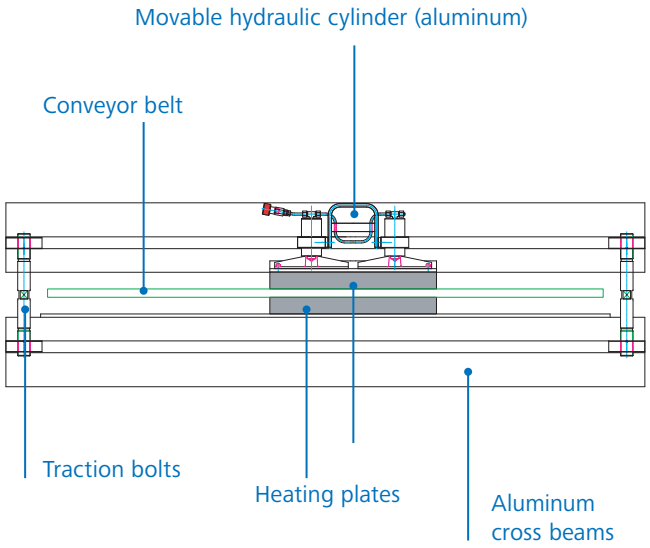

* Available in all desired dimensions

Spot Repair Vulcanizing Press EMU

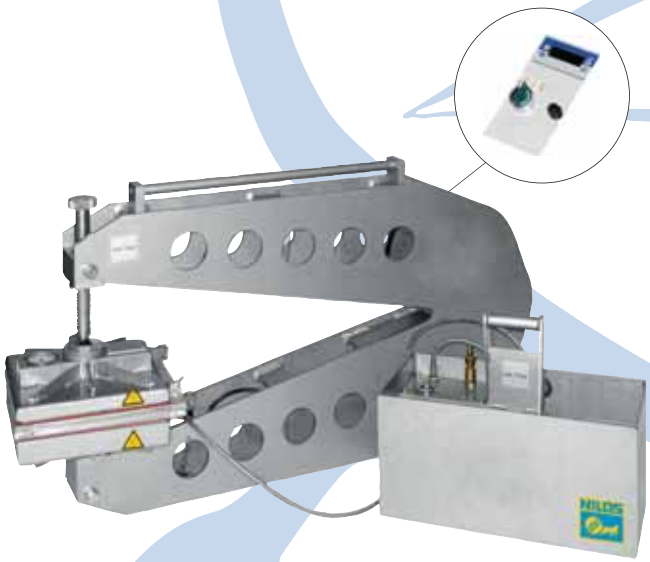

Spot repair press of light weight construction
- for spot repairs on rubber conveyor belts
- for overhang of 800 mm, 1.000 mm and 1.200 mm
- particularly easy to transport due to the low weight of the single parts
- simple assembly without the need of any tools
- uniform pressure distribution by means of the pressure bag
- adjustable temperature from 100 up to 170° C

Heating plates
- heating plates can be disassembled for transport and stored in the transport box
- heating plates with electronic temperature control, signal lamp and digital temperature display
- water-/air-cooling

Transport box for heating plates
- transport box for heating plates with integrated air control box, easy to handle

C-Clamp
- C-Clamp of high-alloy aluminium, solid welded construction
- highest bending resistance at minimum weight
- press overhang available: 800 mm, 1.000 mm and 1.200 mm

Compressed air supply
- compressed air is regulated by an integrated air control box with safety valve and an easy to read pressure gauge
- connections and indicating instruments are easily reached from the top
- compressed air to be supplied by the customer
- optionally a light weight compressor can be supplied

EMU	800	1.000	1.200
Overhang	800 mm	1.000 mm	1.200 mm
Opening of jaw		110 mm	
Weight C-Clamp	40 kg	54 kg	67 kg
Weight per heating plate		8 kg	
Weight transport unit		10 kg	
Specific surface pressure		50 N/cm² (70 psi)	33 N/cm² (47 psi)
Heating area		300 x 300 mm	
Temperature range		100 - 170 °C	
Voltage		230 V 50 Hz, 1 Ph, N, PE *	
Capacity		1,2 kW	
Compressed air supply		to be provided by Customer	
Cooling media		Air or water	

* Delivery option also in 110 V

ROTOCUT

ROTOCUT RCM 20

Technical data
- belt thickness up to 20 mm
- Ø steel cord up to 7,5 mm (ST2500)
- manual drive
- carrying side max. 9 mm
- running side max. 5 mm
- weight: 45 kg

ROTOCUT RCE 20

Technical data
- belt thickness up to 20 mm
- Ø steel cord up to 7,5 mm (ST2500)
- capacity 0,55 kW, 400 V, 50 Hz, 3 Ph *
- cutting speed 1,20 m/min
- carrying side max. 9 mm
- running side max. 5 mm
- weight: 65 kg

ROTOCUT RCE 40

Technical data
- belt thickness up to 40 mm
- Ø steel cord up to 11 mm (ST5400)
- capacity 1,10 kW, 400 V, 50 Hz, 3 Ph *
- cutting speed 1,10 m/min
- carrying side max. 19 mm
- running max. 10 mm
- weight 165 kg
- emergency stop

* Other voltages on request

ROTOCUT

- safe cutting / separating of steel cord conveyor belts
- cutting tools can be easily replaced
- portable device for easy and rapid use in the fi eld
- the working direction can be corrected when guiding the device manually (in case of electric drive simply by pressing the switch)
- a guide rail is not required

Cord Stripper System

1 Cord stripper

The Cord Stripper is an indispensable accessory to strip and separate the steel cables of conveyor belts.

Technical details	Item no.
Cord stripper • belt width up to 43 mm • Ø cable 3,7 - 12,6 mm • cord width 10 - 25 mm • cover plate thickness running side till 25 mm • cover plate thickness carrying side till 12 mm • dimension (L x H x W) 375 x 215 x 405 mm • weight 12 kg • 1 blade holder set type A + pressure roller • 1 blade holder set type B + pressure roller • 1 tool set	K 1200
1 blade holder set type A + pressure roller	K 1210
1 blade holder set type B + pressure roller	K 1220
1 tool set	K 1230

2 Blades for cord stripper

The minimum order quantity of each blade is 50 pieces (O = Top and U = Bottom). Blades are not part of the delivery of the cord stripper and must be ordered separately.

Blade no.	Blade holder	Cable Ø	Item no.
4,5		3,7 - 4,1 mm	K 1045-O /-U
5		4,2 - 4,6 mm	K 1050-O /-U
5,5		4,7 - 5,1 mm	K 1055-O /-U
6		5,2 - 5,6 mm	K 1060-O /-U
6,5		5,7 - 6,1 mm	K 1065-O /-U
7	A	6,2 - 6,6 mm	K 1070-O /-U
7,5		6,7 - 7,1 mm	K 1075-O /-U
8		7,2 - 7,6 mm	K 1080-O /-U
8,5		7,7 - 8,1 mm	K 1085-O /-U
9		8,2 - 8,6 mm	K 1090-O /-U
9,5		8,7 - 9,1 mm	K 1095-O /-U
10		9,2 - 9,6 mm	K 1100-O /-U
10,5		9,7 - 10,1 mm	K 1105-O /-U
11		10,2 - 10,6 mm	K 1110-O /-U
11,5	B	10,7 - 11,1 mm	K 1115-O /-U
12		11,2 - 11,6 mm	K 1120-O /-U
12,5		11,7 - 12,1 mm	K 1125-O /-U
13		12,2 - 12,6 mm	K 1130-O /-U

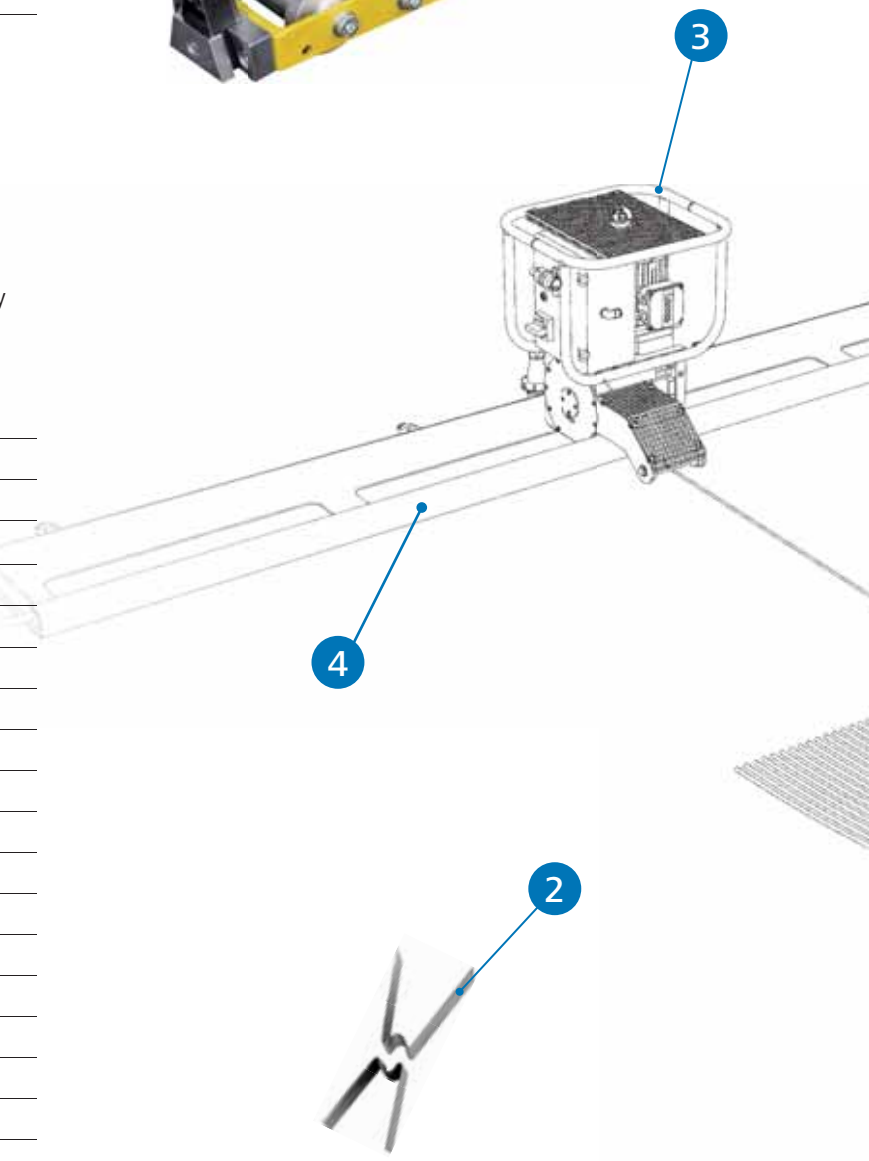

Capacity winch CS

The power winch CS is an indispensable part of the cord stripper System. It is specially designed for continuous use and is especially characterized by high tensile speed, the torque and the nearground cable conduit. In addition, the signal color contributes to work-place safety. The safe operation of the supply and return takes place (4m long) via the control panel with emergency stop switch.

The electronic phase control ensures that the operation of supply and return is always consistent.

Technical Details	Item no.
Capacity winch CS • rope made of steel 6 m • remote control 4 m • power 2,20 kW, 400 V, 50/60 Hz, 3 Ph + PE * • dimensions (L x H x W) 620 x 500 x 650 mm • protection type IP 54 • weight approx. 70 kg • tensile speed: approx. 34 m/min. • overload protection	on request
Rope made of steel 10 m	K 1310

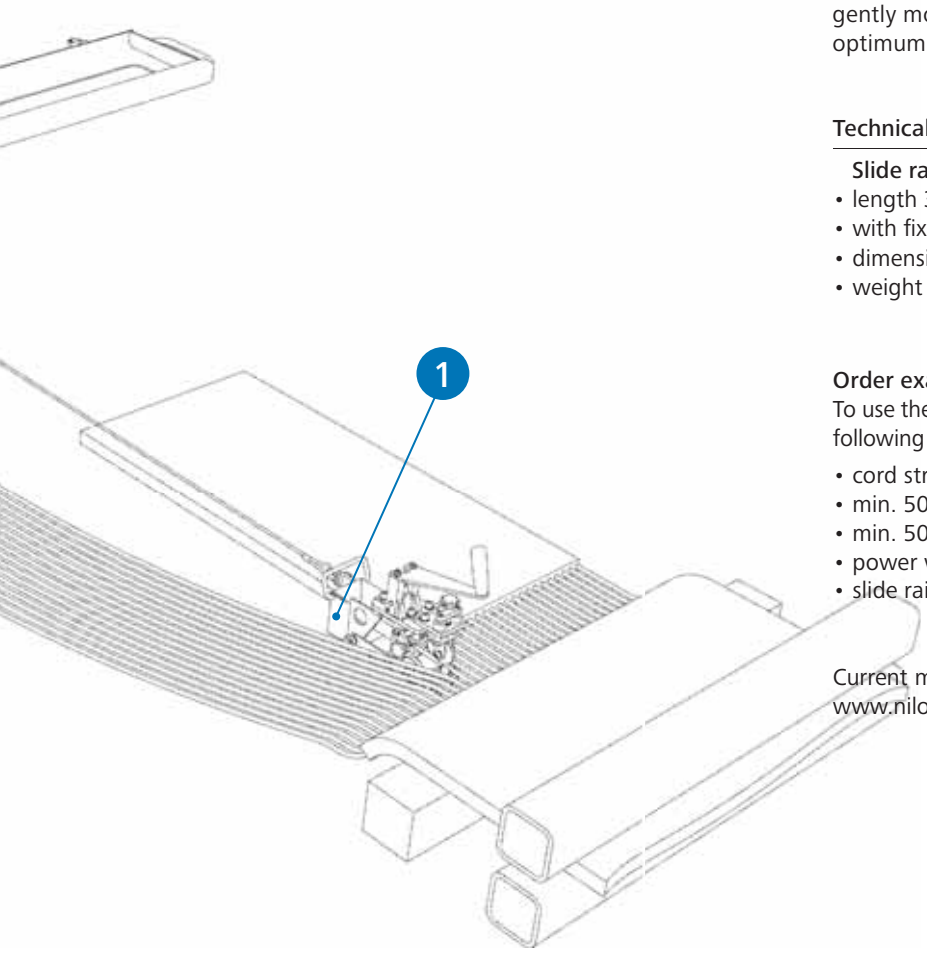

4

Slide rail for Capacity winch CS

The slide rail is fixed transversely to the conveyor belt and is used to safely accommodate the Capacity winch CS. By gently moving the Capacity Winch within the guide rail, the optimum position for the pulling direction is assured.

Technical Details	Item no.
Slide rail for Capacity winch CS • length 3,5 m • with fixing points for belt width up to 3.000 mm • dimensions (L x W x H) 3.500 x 380 x 70 mm • weight 60 kg	K 1316

Order example:
To use the cable stripper system for the first time, you need the following components:

- cord stripper
- min. 50 x blades (top) for cord stripper
- min. 50 x blades (bottom) for cord stripper
- power winch CS *
- slide rail for Capacity Winch CS

Current movies can be found at:
www.nilos.de

* Other voltages on request

Belt Ripper

The Belt Ripper is intended for the cutting of conveyor belts of all assembly types and strengths, in particular of steel cord belts. The ripping cut is made at right angles to the belt running direction.

The Belt Ripper is intended for stationary and mobile use.
In the case of stationary use, the belt clamping frame is opened in parallel and the conveyor belt is pushed into the belt clamping frame. In the case of mobile use, the belt clamping frame suspended from the crane is opened scissors-like and moved into the belt conveyor.

Alternatively the belt clamping frame standing on the ground with mounted wheelsets can be opened scissors-like and moved into the belt conveyor. For this purpose a rail track is to be provided by the customer.

The Belt Ripper consists of the following components:
- Belt clamping frame
- Electrical switch cabinet
- Hydraulic unit

Current movies can be found at:
www.nilos.de

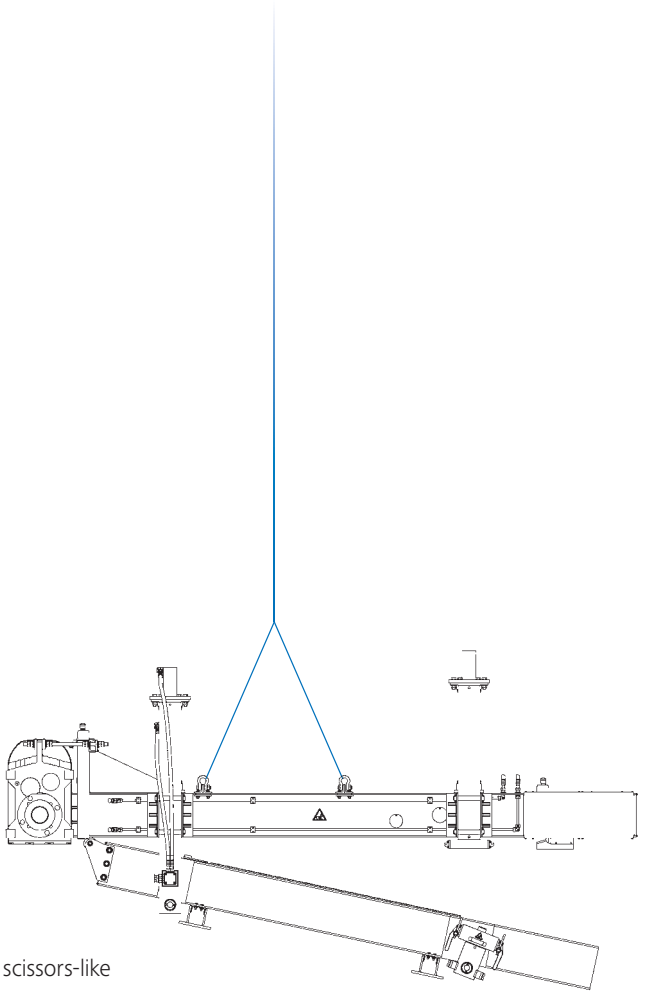

scissors-like

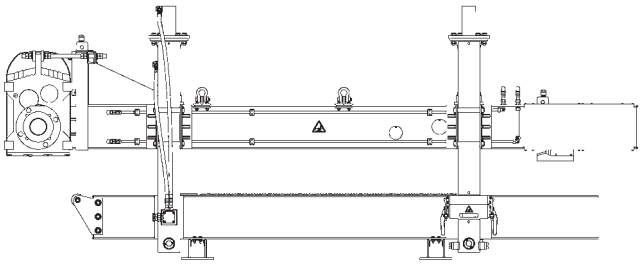

parallel

Dimensions without control unit

Width	approx. 960 mm
Height	approx. 1750 mm
Length	approx. 2600 mm + belt width

Technical data

Service voltage *	DS 400 V, 50 Hz
Driving power, ripping knife	2,2 kW
Driving power, pump motor	3,0 kW
Max. belt width	bis 3200 mm
Max. belt thickness	bis 50 mm
Ripping time for belt width of 3200 mm	approx. 140 sek.

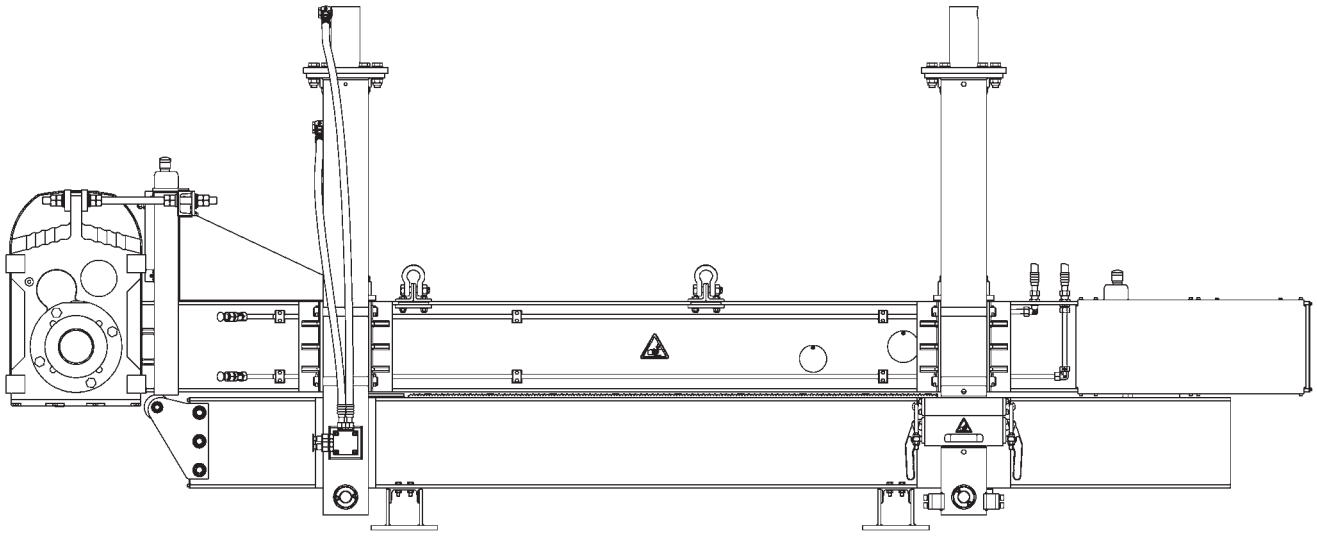

* other voltages on request

Tools

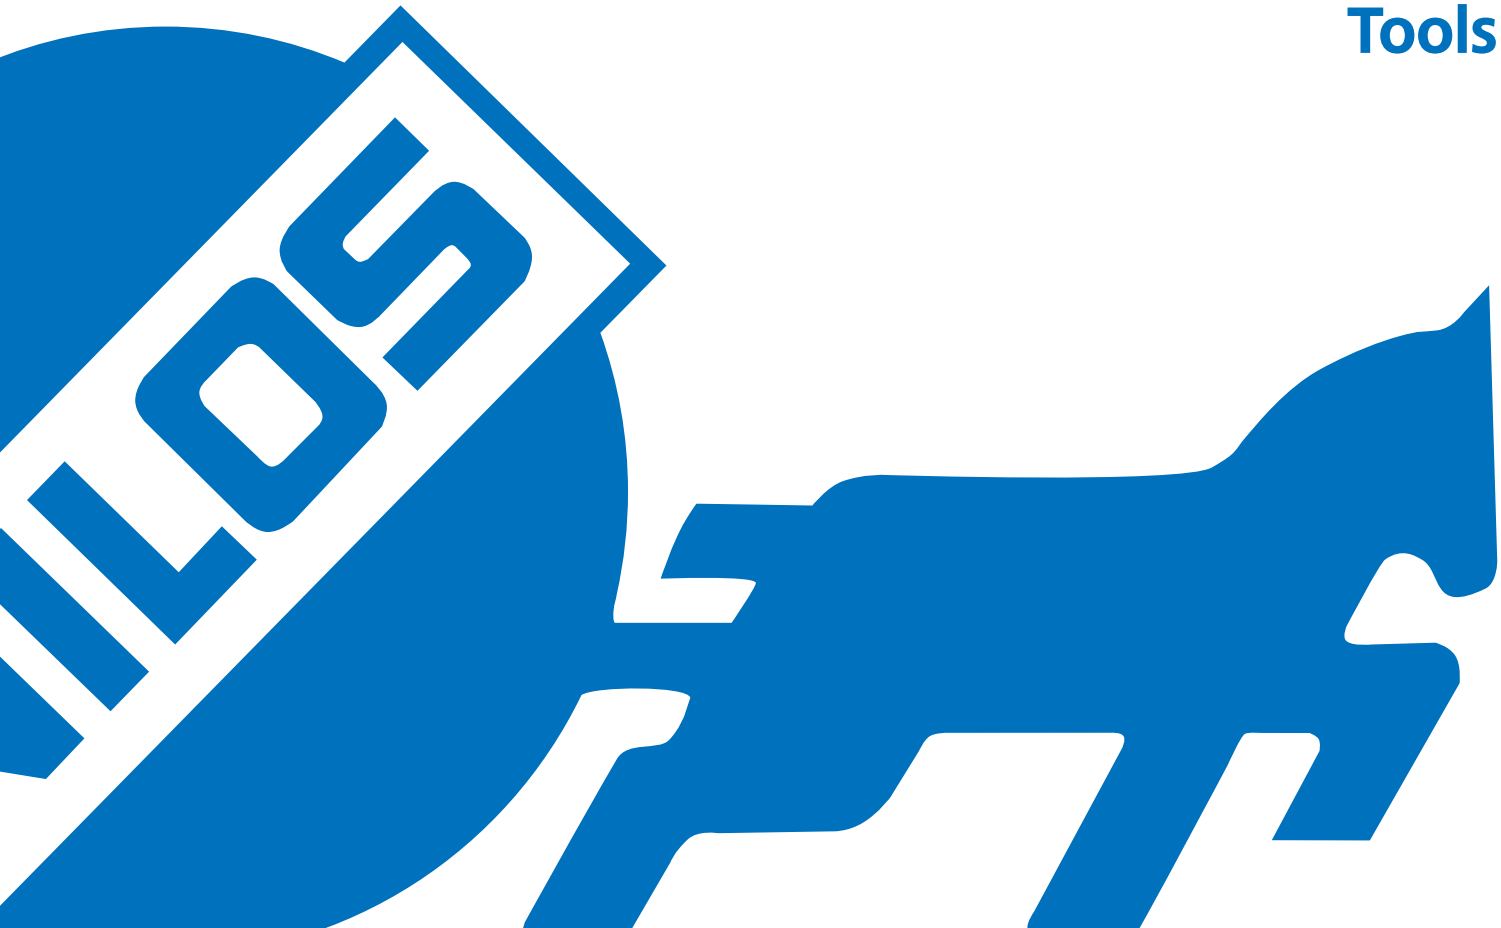

Screw Terminals and Belt End Clamps

Belt end clamps (1 pair) in light metal construction for tightening the belt ends

Max. belt width	Type	Item no.
800 mm	EL 800	E 0183
1.000 mm	EL 1000	E 0184
1.200 mm	EL 1200	E 0185
1.400 mm	EL 1400	E 0186
1.600 mm	EL 1600	E 0187
1.800 mm	EL 1800	E 0188
2.000 mm	EL 2000	E 0193

- with hand screws (max. 40 kN)
- clamping range 5 - 30 mm

Belt End Clamps (1 Pair) in steel construction for tightening the belt ends

Max. belt width	Type	Item no.
1.200 mm	ELC 1200	E 0200
1.400 mm	ELC 1400	E 0201
1.600 mm	ELC 1600	E 0202
1.800 mm	ELC 1800	E 0203
2.000 mm	ELC 2000	E 0204
2.200 mm	ELC 2200	E 0205
2.400 mm	ELC 2400	E 0206
3.200 mm	ELC 3200	E 0207

- with hand screws and deflection compensator (max. 50 kN)
- variable clamping range

Cooling Tubes Type JKL for PVC

Max. belt width	Type	Item no.
500 - 1.000 mm	JKS 50	J 0478
1.000 - 1.400 mm	JKS 100	J 0479
1.400 - 1.800 mm	JKS 140	J 0480
1.800 - 2.200 mm	JKS 180	J 0513
2.200 - 2.600 mm	JKS 220	J 0515
2.600 - 3.000 mm	JKS 260	J 0517

Clamps for Edge Rails (1 Pair)

Max. belt width	Type	Item no.
all belt widths	UNI	J 0600

- adjustable for various belt widths

Cable winch, 20 m

Traction power	Type	Item no.
500 kg	EM 55 Motor driven 400 V 50 Hz 3 Ph	E 0191
800 kg	EG 8A	E 0190
980 kg	EM 100 Motor driven 400 V 50 Hz 3 Ph	E 0194
1.600 kg	EG 16A	E 0208
3.200 kg	EG 32A	E 0209

Traction cable for cable winch with load hook, 20 m

Cable diameter	Suitable	Item no.
8,4 mm	EG 8 A	E 0190-1
11,5 mm	EG 16 A	E 0190-2
16,0 mm	EG 32 A	E 0190-3

- totally enclosed automatic brake
- 1.5 m travel

Ratchet hook with chain galvanized (round) steel chain,

Traction power	Chain length	Type	Item no.
750 kg	1,7 m	ER 750	E 0300
1.500 kg	1,7 m	ER 1.500	E 0301
3.000 kg	1,8 m	ER 3.000	E 0302
6.000 kg	3,6 m	ER 6.000	E 0303
9.000 kg	5,3 m	ER 9.000	E 0304

Rope block for doubling traction power

Traction power	Type	Item no.
Max. 2.000 kg	ESF 16 for EG8A/EM 55	E 0192
Max. 5.000 kg	ESF 40	E 0195

Tool Bag

Leather tool bag

Description	Item no.
Tool bag without tools	K 0659

- with hand grip and adjustable shoulder strap
- incl. padlock with 2 keys
- size: approx. 460 x 210 x 170 mm

Leather tool bag incl. Tools

Description	Item no.
Tool bag with tools	K 0665
Weight approx. 9 kg	

The set included the following tools:
Knife, simple with a short blade
Blade length 150 mm
2x Cobblers knife with exchangeable blade
Spare blade for Cobblers knife
Layer separating knife
Knife with flexible blade
Angled knife
Quarter moon knife
Whetstone with wooden haft, 100 x 25 x 10 mm
Curled roller, 4 mm wide
Spiked roller, 27 x 52 mm
Flachroller, 12 mm wide
Flat roller, 40 mm wide
Hohlroller, 12 mm breit
Roughening brush with pad
3x Spare pad for Roughening brush
Wire brush
Rubber shears 100 mm
Pliers, Length 200 mm
Screwdriver 175 x 10 mm
Stripping hook 150 mm length
Folding rule 2 m
Round brush size 4
Round brush size 12
Handbrush
Rubber hammer
Belt grips for belts up to 21 mm thick
Tape measure 2 m length
Protective spectacles
Marking cord with chalk dust container
Chalk line Powder, yellow, 180 g
Industrial gloves
Packet of white chalk, 1 VPE = 12 pieces
Yellow grease pencils, 1 VPE = 12 pieces

VPE = Items per unit

Canvas rollbag

Description	Item no.
Canvas rollbag without tools	K 0700

- with leather strap
- size: approx. 475 x 325 mm

Knife	Item no.
With short blade, simple	K 0601
With long blade, simple	K 0602

Saddlers knife	Item no.
Blade length 150 mm / 6“	K 0604
Blade length 200 mm / 8“	K 0744

Cobblers knife	Item no.
With exchangeable blade	K 0605
Spare blade	K 0606

	Item no.
Layer separating knife	K 0607

	Item no.
Knife with flexible blade	K 0608

	Item no.
Angled knife	K 0609

	Item no.
Quarter moon knife	K 0610

Whetstone, with wooden haft	Item no.
100 x 25 x 10 mm	K 0611
200 x 25 x 10 mm (and groove)	K 0634

Curled roller	Item no.
4 mm wide	K 0612

Spiked roller	Item no.
27 x 52 mm	K 0613

Small Tools

Stripping hook	Item no.
150 mm length	K 0623

Flat roller	Item no.
12 mm wide	K 0614
40 mm wide	K 0615

Roughening brush	Item no.
With pad	K 0617
Spare pad	K 0618

Wire brush	Item no.
Wire brush	K 0619

Rubber shears	Item no.
100 mm	K 0620

Pliers	Item no.
Length 200 mm	K 0621
Length 300 mm	K 0745

Screwdriver	Item no.
175 x 10 mm	K 0622

Concave roller	Item no.
12 mm wide	K 0616

Round brush	Item no.
Size 4	K 0625
Size 12	K 0626

Handbrush	Item no.
Handbrush	K 0627

Rubber hammer	Item no.
Rubber hammer	K 0628

- for marking and cutting the angle of splice

Belt Square

Belt width	Type	Item no.
800 mm	JW 80	J 0481
1.000 mm	JW 100	J 0482
1.200 mm	JW 120	J 0483
1.400 mm	JW 140	J 0484
1.600 mm	JW 160	J 0485
1.800 mm	JW 180	J 0486

- 338 x 90 mm
- weight 1,1 kg
- temperature 40 - 650° C
- air consumption max. 320 Liter/min

Heat Blower

Capacity	Voltage	Item no.
2.700 W	110 V/60 Hz	K 0699
3.400 W	230 V/50 Hz	K 0698

Double acting roller

Belt width	Item no.
800 mm	K 0642
1.200 mm	K 0643
1.600 mm	K 0644
2.000 mm	K 0676

Frog clamps

Traction power	Weight	Item no.
300 kg	2,3 kg	K 0754
1.000 kg	2,4 kg	K 0646
1.000 kg	5,7 kg	K 0760

Belt grips	Item no.
For belts up to 13 mm thick	K 0649
For belts up to 21 mm thick	K 0650

- to remove bonded rubber strip

Tear-out claw	Item no.
Tear-out claw	K 0766

Small Tools

Shore hardness gauge	Item no.
Shore hardness gauge	K 0652

Conveyor belt measuring device (meters)	Item no.
Conveyor belt measuring device (meters)	K 0648

Belt thickness gauge	Item no.
Measuring range 0 - 30 mm	K 0660

Thermometer for heating plates	Item no.
Glass-thermometer	K 0653

Bimetal dial type thermometer	Item no.
2 off in protective case	K 0655

- for heating plates

Digital thermometer	Item no.
With heat sensor and suitcase	K 0771
Digital thermometer	K 0771-A
Box	K 0771-B
Sensor 130 mm, Ø 3 mm cable 1.200 mm	K 0771-C
Sensor 130 mm, Ø 3 mm cable 2.500 mm	K 0771-D
Adapter 130 mm	MZ 027017

- measuring range: - 50° C to + 1.150° C
- for mutual connection of 2 exchange sensors (NiCrNi)

Folding rule	Item no.
2 m	K 0624

Tape measure	Item no.
2 m length	K 0657
5 m length	K 0657-A
20 m length	K 0656

Chalk line powder	Item no.
Marking cord with chalk dust container	K 0661
Powder, yellow, 180 g	K 0661-A

Screw clamp	Item no.
Screw clamp	K 0654

Industrial gloves	Item no.
Industrial gloves	K 0662

Protective spectacles	Item no.
Protective spectacles	K 0658

Packet of white chalk	Item no.
1 VPE = 12 pieces	K 0663
Yellow grease pencils	
1 VPE = 12 pieces	K 0664

Handextruder on page 21

VPE = Items per unit

Rubber Cutting Machine

Electrical rubber cutting machine with 1x HSS Ø 170 mm, maximum thickness up to 25 mm

- shore hardness 25 - 90 Sh° A
- pneumatic version on request

Capacity	Weight	Item no.
580 W, 230 V, 50 Hz	7 kg	K 0782
18 V, 3,0 Ah, 230 V, 50 Hz with 2 batteries, charger	8 kg	K 0782-C
Replacement circular saw blade HSS Ø 170 mm		K 0782-M

Electrical rubber cutting machine with 1x HSS Ø 225 mm, maximum thickness up to 50 mm

Capacity	Weight	Item no.
580 W, 230 V, 50 Hz	13 kg	K 0783
Replacement circular saw blade HSS Ø 225 mm		K 0783-M

Pneumatic Rubber Cutting Machine with 1x HSS Ø 220 x 2 mm, maximum thickness up to 50 mm

Capacity	Item no.
4-6 bar, 30 U/min., rpm	K 0737
Replacement circular saw blade HSS Ø 220 x 2 mm	K 0738

Rubber stripper complete with transport box, 1 cutter, toolkit, protective gloves

Capacity	Weight	Item no.
1050 W, 230 V, 50 Hz*	9,1 kg	K 0763
Blades 120 x 1 mm, 1 VPE = 10 pieces		K 0764
Blades 200 x 1 mm, 1 VPE = 10 pieces		K 0765

Easy Cut

- electrical knife for cutting steel cord plates

Capacity	Weight	Item no.
18.500 U/min., 400 W, 230 V, 50 Hz	4 kg	K 0781
Blades, 1 VPE = 2 pieces		EK 6600455

* Other voltages on request
VPE = Items per unit

Regroover

Mains supply circuit for connected operating handle	Weight	Item no.
230 V, 50 Hz	11,5 kg	K 0678
115 V, 50Hz	11,5 kg	K 0678-A
Operating handle for coupling mains supply circuit, 2 m Cable		
cutting head with clamping width segmented cutting from 2 to 28 mm	1,5 kg	K 0677
Regroover complete: K 0678 and K 0677		K 0679

- cutting head with clamping width segmented cutting from 2 to 28 mm

Compact-Regroover with three-step switch

Capacity	Weight	Item no.
230 V, 50 Hz	1,8 kg	K 0680
115 V, 50Hz	1,8 kg	K 0680-A

Regroover blades for regroover

Round

Cutting width	Cutting depth	Item no.
2 - 4 mm	7 mm	K 0681
4 - 6 mm	8 mm	K 0682
6 - 8 mm	10 mm	K 0683
8 - 10 mm	14 mm	K 0684
10 - 14 mm	16 mm	K 0685

Angle

2 - 4 mm	7 mm	K 0686
4 - 6 mm	8 mm	K 0687
6 - 8 mm	10 mm	K 0688
8 - 10 mm	14 mm	K 0689
10 - 14 mm	16 mm	K 0690

V-shaped

2 - 4 mm	7 mm	K 0691
4 - 6 mm	8 mm	K 0692
6 - 8 mm	10 mm	K 0693
8 - 10 mm	14 mm	K 0694
10 - 14 mm	16 mm	K 0695
16 - 22 mm	16 mm	K 0696
22 - 28 mm	16 mm	K 0697

Roughing Machine

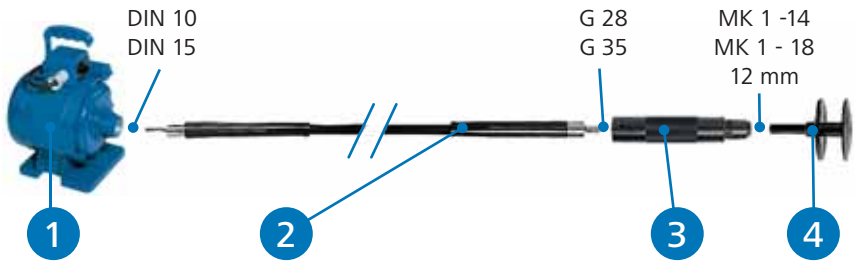

1

Roughing machine with base plate and carrying handle

Capacity	Coupling	Weight	Item no.
1.000 W, 400 V, 50 Hz 2.800 U/min	DIN 10	10,8 kg	K 0706
1.500 W, 400 V, 50 Hz 2.800 U/min	DIN 15	13,9 kg	K 0703

Scope of delivery:
- Flexible shaft by K 0706: DIN 15 / G 35: K 0711
- Flexible shaft by K 0703: DIN 10 / G 35: K 0710
- Toolholder: G 35 / MK 1-14: K 0713
- Overhung spindles, MK 1-14: K 0714

2

Flexible Shafts 2.000 mm Length

Ø Seele	Coupling	Weight	Item no.
12 mm	DIN 10 / G 28	3,75 kg	K 0748
	DIN 10 / G 35		K 0710
	DIN 15 / G 35	3,85 kg	K 0711
15 mm	DIN 15 / G 35	5,25 kg	K 0712

Scope of delivery: Consisting of shaft with rubber protective casing with reinforcing sleeves and outer metal couplings

3

Toolholder (straight) for flexible shafts

Length	Coupling	Weight	Item no.
42 x 193 mm	G 35 / MK 1-14	1,13 kg	K 0713
33 x 162 mm	G 28 / 12 mm	0,51 kg	K 0749
42 x 217 mm	G 35 / 12 mm	1,23 kg	K 0750

4

Overhung Spindles

Ø External x width x Ø inside	Coupling	Weight	Item no.
125 x 20 x 14 mm	MK 1-14	0,49 kg	K 0714
150 x 50 x 18 mm	MK 1-18	0,51 kg	K 0715
125 x 20 x 14 mm	12 mm	0,31 kg	K 0752
150 x 50 x 18 mm	12 mm	0,51 kg	K 0753

- for straight grinding machine: K 0701-C
- for toolholder
- with clamping plates for grinding wheels, brushes etc. for mounting tools on toolholders

Scope of delivery:
- Flexible shaft, DIN 10 / G 28: K 0748
- Toolholder
- Overhung spindles, MK 1-14: K 0714

Universal high power roughing machine with 3 Speeds from 3.000 - 12.000 U/min.

Capacity	Weight	Item no.
1.700 W, 230 V, 50 Hz Coupling DIN 10	19,8 kg	K 0740-A
1.700 W, 110 V, 50 Hz Coupling DIN 15	15,5 kg	K 0740-B

Scope of delivery: recording for separation and buffing

Angle grinder for rubber and steel, discs Ø 125 mm

Capacity	Weight	Item no.
2.800 - 11.000 U/min, 1.200 W, 230 V, 50 Hz	2,2 kg	K 0790-A

Scope of delivery: cutting disc for recording

Angle grinder to work on metal discs Ø 230 mm

Capacity	Weight	Item no.
6.600 U/min, 2.200 W, 230 V, 50 Hz	5,8 kg	K 0791-A

Scope of delivery: rubber Plate, low for buffing

Rotary sander for rubber processing, discs Ø 180 mm

Capacity	Weight	Item no.
1.500 - 4.000 U/min, 1.600 W, 230 V, 50 Hz	3,4 kg	K 0792-A

Scope of supply: 5x **Alloy steel roughing discs** (optional in Grain 18: K 0768, 23: K 0769, or 36: K 0770)

Star wheel grinder, safety hood with side plates and connection piece for buffing dust extraction 120 mm Buffing Width

Capacity	Weight	Item no.
1.200 - 3.700 U/min, 1.600 W, 230 V, 50 Hz	4 kg	K 0767-A

Straight grinder for rubber processing

Capacity	Weight	Item no.
1.400 - 3.000 U/min., 1.530 W, 230 V, 50/60 Hz, 14 -18 mm drilling	3,1 kg	K 0701-C
3.800 U/min., pneumatic, 17 mm drilling	5,2 kg	K 0666

Accessories

Alloy steel roughing discs

- for angle grinder type K 0790-A and K 0792-A (on page 87)

Grain	Inner diameter	Outer diameter	Item no.
18	22 mm	125 mm	K 0725
23			K 0726
18		175 mm	K 0727
23			K 0728

Alloy steel roughing discs (star wheels)

- for star wheel grinder K 0767 (on page 87)

Grain	Inner diameter	Outer diameter	Item no.
18	19 mm	100 mm	K 0768
23			K 0769
36			K 0770

Copperbound hardmetal roughing heads

Grain	Inner diameter	Outer diameter x Thickness	Item no.
18	14 mm	76 x 32 mm	K 0672
23		76 x 32 mm	K 0719
18		102 x 38 mm	K 0673
23		102 x 38 mm	K 0720

Copperbound hardmetal roughing heads

Grain	Inner diameter	Outer diameter x Thickness	Item no.
18	14 mm	102 x 38 mm	K 0674
23			K 0721

Cut-off wheels

- with clamping device for clamping flexible fiber discs

Inner diameter	Outer diameter x Thickness	Item no.
22 mm	125 x 2,5 mm	K 0805
	125 x 6,0 mm	K 0806
	125 x 8,0 mm	K 0807
	230 x 3,0 mm	K 0734
	230 x 6,0 mm	K 0735
	230 x 8,0 mm	K 0736

- with clamping device for use with resin fiber discs K 0792-A with K 0729 or K 0790-A with K 0808 (go to page 91)

- for angle grinder K 0790-A and K 0791-A (go to page 91)

Flexible support plates for angle grinder

Thread	Outer diameter	Item no.
M 14 für K 0792-A	180 mm	K 0729
M 14 für K 0790-A	125 mm	K 0808

Resin fiber discs

Grain	Inner diameter	Outer diameter	Item no.
16	22 mm	125 mm	K 0756
24			K 0801
40			K 0802
50			K 0803
60			K 0804
16		178 mm	K 0730
24			K 0731
40			K 0636
50			K 0732
60			K 0733

Wire brushes

Inner diameter	Outer diameter x Thickness	Item no.
14 mm	100 x 30 mm	K 0747
16 mm	120 x 30 mm	K 0773
18 mm	120 x 30 mm	K 0716
18 mm	150 x 30 mm	K 0742
20 mm	120 x 30 mm	K 0629

Concave brushes

Inner diameter	Outer diameter x Thickness	Item no.
14 mm	100 x 30 mm	K 0762
16 mm	100 x 30 mm	K 0774
18 mm	100 x 25 mm	K 0717
20 mm	100 x 30 mm	K 0630

Tufted brushes

Inner diameter	Outer diameter x Thickness	Item no.
14 mm	100 x 50 mm 3-row	K 0761
16 mm		K 0775
18 mm	100 x 50 mm 5-row	K 0718
20 mm		K 0631
30 mm	125 x 30 mm, 3-row	K 0755

Cable Cutter

Hydraulic cable cutter for wire cables up to Ø 12 mm

Capacity	Item no.
230 V, 50 Hz	K 0640
400 V, 50 Hz	K 0743

Replacement blades (without connecting bolt)	K 0641
Tubular frame	K 0739

Cutting force for wire cables up to Ø 16 mm

Length	Weight	Item no.
630 mm	2,30 kg	K 0772
Replacement blades	-	K 0772-A

Cable cutting shear up to Ø 12 mm

Length	Weight	Item no.
700 mm	3,55 kg	K 0638
Replacement blades	-	K 0639

NILOS

Services

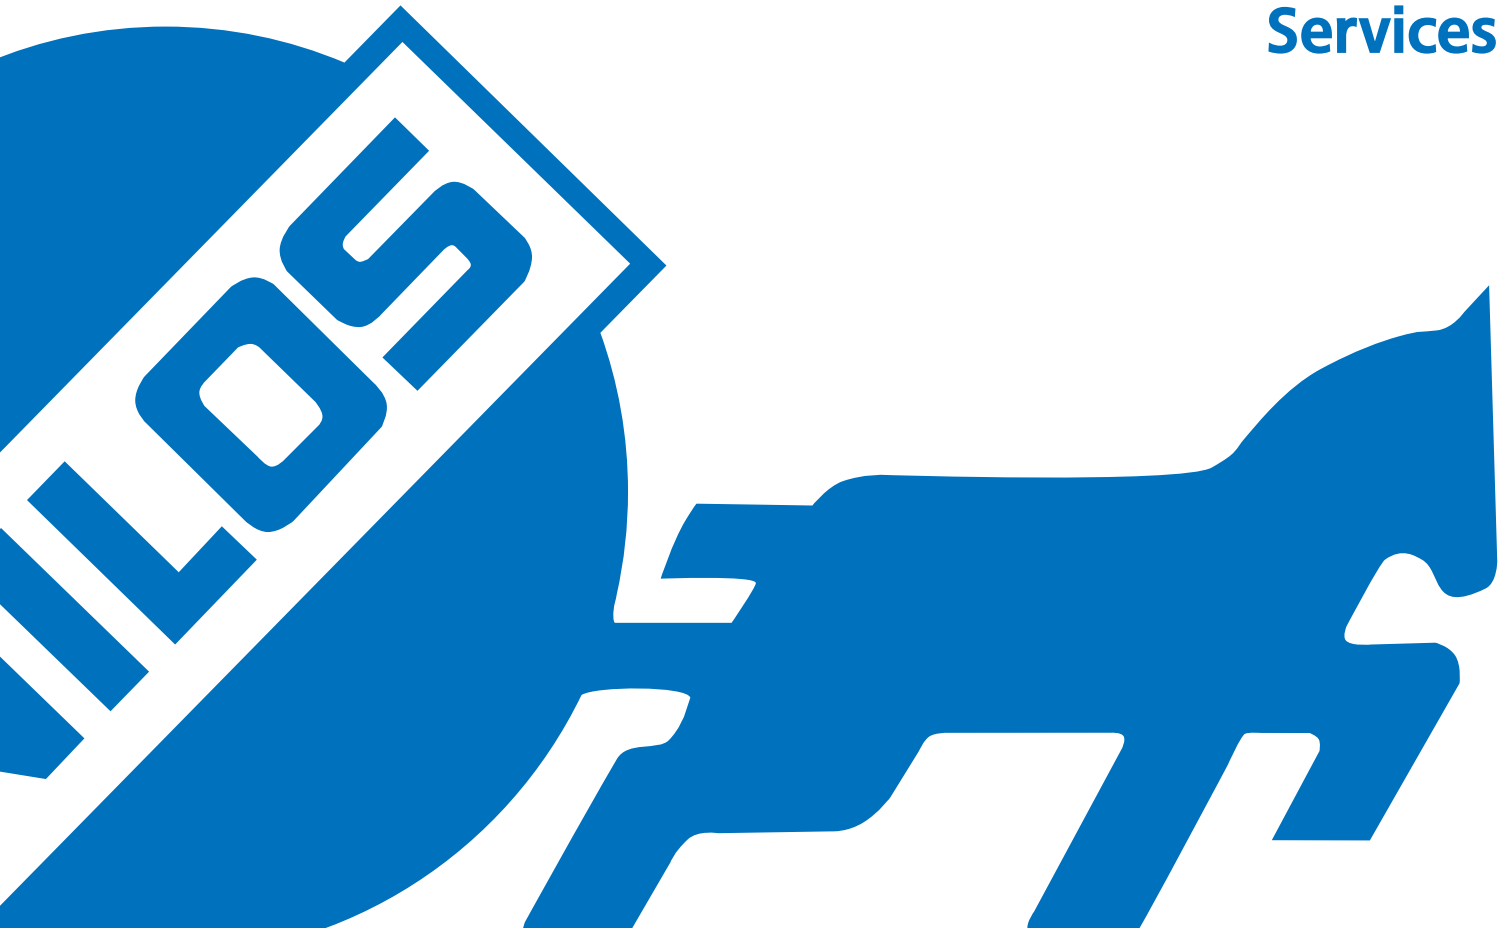

Services

NILOS offers almost all assembly services:

Belt repair and belt splices
- repairing of longitudinal cracks, transverse cracks, breakdowns and edge damage with hot vulcanizing
- repair of partial surface damage on running- and carrying sides with cold vulcanizing

Belt finishing
- by using hot vulcanizing the conveyor belt is subsequently provided with edge bead
- sidewalls and cleats of all kinds are applied with cold vulcanizing

Belt renewal
- the customer gets a good as new conveyor belt with the mileage of a new belt
- worn out belt surfaces are retreaded and vulcanized to original strength on running and carrying sides
- our know-how in Belt Recycling additionally enables the assembly of up to four individual strips to a belt body

Belt Recycling
- we offer the complete disposal of unusable conveyor belts to

Damage assessment and counseling
- damage assessment, definition of damage repair, NILOS testing laboratory for evaluation and validation of technical parameters

Training
A service that is often used and much appreciated is the training and instruction of belt vulcanizing operators at our factory. We transfer all the relevant theoretical and practical knowledge we have about conveyor belts.

NILOS campus
NILOS is certified by Certqua. The knowledge gained during training courses can be implemented into daily working processes. Preventive maintenance and detection of faults as well as purposeful adjustment will be facilitated. Expert instructions and skilled trainers with many years of experience and highest qualifications conduct the theoretical and practical schooling and training course: campus@nilos.de

Operating Belt Conveyors
We do the worrying when it comes to your conveying problems and regular scheduled maintenance for your conveyor belt unit. Our technicians will put right any problems and faults in the shortest possible time.

Final Disposal
Old belts that can no longer be recycled are disposed of in a cost-effective and environmentally friendly way.

Franchising
There is an additional option, to make use of the know-how, infrastructure and products of the NILOS brand as a NILOS franchising partner and thus ensuring a presence in the market as a strong and competent partner.

NILOS campus

Scan the QR-Code and learn more about NILOS on www.nilos.de.

Design and Supply of Complete Conveyor belt Repair Workshops
Realization with a wide range of equipment and special-purpose machines developed by us, on request.

Specialized personnel can be trained by us – the program includes complete instruction of NILOS technology and know-how transfer for the repair of conveyor belts of all types and sizes.

Conveyor belts require a high amount of investment in belt units. Conveyor belt repair, regeneration and refurbishing preserve the resources of our planet. NILOS offers workshop facilities with tried and tested technology for the refurbishing of damaged or worn fabric and steel cord belts. Decades of experience in practice guarantee our competence in planning, design and equipping.

Starting with the servicing of small- and medium-sized damaged areas, the repair facilities also include conveyor belt regeneration and refurbishing, supplemented by the use of unvulcanized rubber materials from our own preparation division.

We can offer the following type of workshop facilities:

NILOS Repair Workshop
Splicing, repairing of damaged belts and service facilities in plant and on site with mobile vulcanizers.

NILOS Regeneration Workshop
Treating worn areas on conveyor belts that are still usable overall.

NILOS Reconditioning Workshop
Incorporation of new belt partial strips and overall refurbishing of damaged or worn conveyor belts.

NILOS Workshop for Conveyor belt Regeneration with Rubber Preparation Division and Test Laboratory
The combination of the above-mentioned types makes it possible to carry out the work completely independently and without any additional suppliers, thanks to special machine facilities.

These four basic types can be adapted individually to customer-specific requirements. Any existing suitable facilities are incorporated in the planning and setting up.

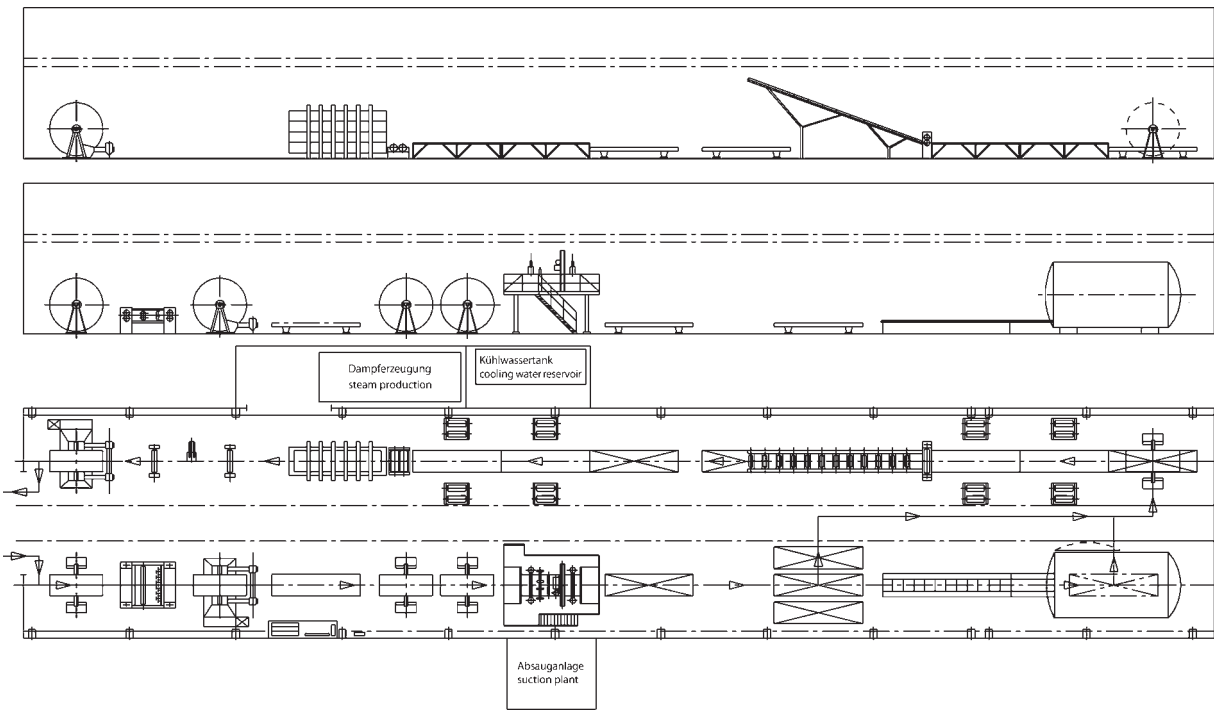

Technical questionnaire for vulcanizing presses

Relevant dimensions to define the size of a heating platen

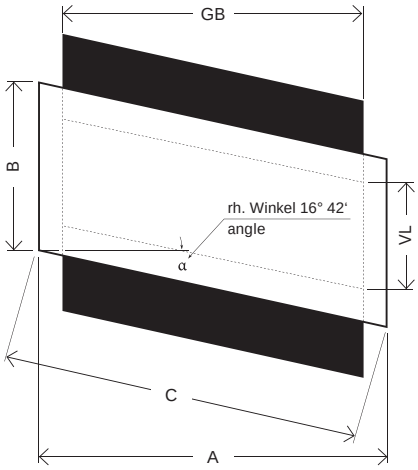

A = plate width
B = plate length
C = edge length
GB = belt width
VL = splice length

NILOS GmbH & Co. KG
Reisholzstr. 15
40721 Hilden • Germany
Phone: +49 2103 951 - 0
Fax: +49 2103 951 - 209
info@nilos.de
www.nilos.de

Please fill out this questionnaire as completely as possible:

1. Contact Information

◯ Mr ◯ Mrs

Contact person

Phone

E-mail

Company

Street & no.

Zip Code & City

Country

Country of use

2. Belt type

◯ Steel cord belt
◯ Textile conveyor belt

3. Place of operation

◯ Underground
◯ Above ground

4. Type of splice

◯ Rhombic 16° 42'
◯ Rhombic 22°
◯ Rectangular 90°

5. Power supply

◯ 220/230 V 3-Ph + Pe
◯ 400 V 3-Ph + Pe + N
◯ 480 V 3-Ph + Pe
◯ _____ V

◯ 60 Hz / 60 C/S
◯ 50 Hz / 50 C/S

6. Belt width

◯ 500 ◯ 650 ◯ 800 ◯ 1000 ◯ 1200 ◯ 1400 ◯ 1600 ◯ 1800 ◯ 2000 ◯ _____

◯ 24" ◯ 26" ◯ 36" ◯ 40" ◯ 48" ◯ 54" ◯ 60" ◯ 72" ◯ 78" ◯ _____

7. Your splice length in mm according to belt manufacturer

◯ 500 ◯ 650 ◯ 800 ◯ 1000 ◯ 1200 ◯ 1400 ◯ 1600 ◯ 1800 ◯ 2000 ◯ _____

8. Temperature

_____ F

9. Belt quality (EP500/4 / ST2000...)

10. Specific surface pressure

Subject to technical alterations

Technical questionnaire for vulcanizing presses

- Please note the relevant dimensions to define the size of a heating platen
- Please fill out this questionnaire as completely as possible

Conversion Table of the Unit of Measurement

Linear measure UK-/US	Linear measure metric	Linear measure metric	Linear measure UK-/US
1 inch [in]	25,4 mm	1 mm	0,03937 inch
1 inch [in]	2,54 cm	1 cm	0,39370 inch
1 foot (12 in) [ft]	0,3048 m	1 m	3,2808 ft
1 yard (3 ft) [yd]	0,9144 m	1 m	1,0936 yd
1 mile (statute) [mi]	1,60934 km	1 km	0,6214 mi
1 mile (nautical) [nmi]	1,852 km	1 km	0,54 nmi
Square measure UK-/US	**Square measure metric**	**Square measure metric**	**Square measure UK-/US**
1 square inch [sq in]	6,4516 cm^2	1 cm^2	0,1550 sq in
1 square foot [sq ft]	0,0929 m^2	1 m^2	10,764 sq ft
1 square yard [sq yd]	0,8361 m^2	1 m^2	1,1960 sq yd
1 square mile [sq mile]	2,5899 km^2	1 km^2	0,3861sq mile
Cubic measure UK-/US	**Cubic measure metric**	**Cubic measure metric**	**Cubic measure UK-/US**
1 cubic inch [cu in]	16,3871 cm^3	1 cm^3	0,061cu in
1 cubic foot [cu ft]	0,02832 m^3	1 m^3	35,3107 cu ft
1 cubic yard [cu yd]	0,76455 m^3	1 m^3	1,30795 cu yd
Capacity measure UK	**Capacity measure metric**	**Capacity measure metric**	**Capacity measure UK**
1 fluid ounce [UK fl oz]	28,4131 cm^3	1 cm^3	0,0352 UK fl oz
1 pint [UK pt]	0,56826 dm^3	1 dm^3	1,7598 UK pt
1 quart [UK qt]	1,13652 dm^3	1 dm^3	0,8799 UK qt
1 gallon [UK gal]	4,54609 dm^3	1 dm^3	0,2199 UK gal
Capacity measure US	**Capacity measure metric**	**Capacity measure metric**	**Capacity measure US**
1 fluid ounce [US fl oz]	29,5735 cm^3	1 cm^3	0,0338 US fl oz
1 liquid pint [liq pt]	0,47317 dm^3	1 dm^3	2,1134 US liq pt
1 liquid quart [liq qt]	0,94635 dm^3	1 dm^3	1,0567 US liq qt
1 gallon [US gal]	3,78541 dm^3	1 dm^3	0,2642 US gal
Weights UK-/US	**Weights metric**	**Weights metric**	**Weights UK-/US**
1 ounce [oz]	28,3495 g	1 g	0,03527 oz
1 pound [lb]	0,45359 kg	1 kg	2,20463 lb
1 ton (short) US	907,185 kg	1 to (1000 kg)	1,102 ton (short)
1 ton (long) UK	1016,05 kg	1 to (1000 kg)	0,984 ton (long)
Speed UK-/US	**Speed metric**	**Speed metric**	**Speed UK-/US**
1 mile per hour [mph]	1,6093 km/h	1 km/h	0,6214 mph (mi/h)
1 mile (nautical) per hour [kn]	1,852 km/h	1 km/h	0,54 kn (nmi/h)
Force UK-/US	**Force metric**	**Force metric**	**Force UK-/US**
1 poundal [pdl]	0,1382 N	1 N	7,2330 pdl
1 pound-force [lbf]	4,4482 N	1 N	0,2248 lbf
1 UK ton-force = 2240 lbf	9,96402 kN	1 kN	0,1004 UK tonf
1 US ton-force = 2000 lbf	8,89644 kN	1 kN	0,1124 US tonf
Pressure UK-/US	**Pressure metric**	**Pressure metric**	**Pressure UK-/US**
1 pound-force/sq ft [lbf/ft^2]	47,8803 Pa	1 Pa = 1 N/m^2	0,02089 lbf/ft^2
1 pound-force/sq in [lbf/in^2]	6,89476 kPa	1 kPa	0,14503lbf/in^2
1 pound-force/sq in (psi)	0,689476 N/cm^2	1 N/cm^2	1,45038 lbf/in^2 (psi)
1 pound-force/sq in (psi)	0,068947 bar	1 bar	14,5038 lbf/in^2 (psi)
Temperature UK-/US	**Temperature metric**	**Temperature metric**	**Temperature UK-/US**
x ° Fahrenheit [° F]	x ° Celsius [° C] x 9/5) + 32	x ° Celsius [° C]	x ° Fahrenheit [° F] – 32) x 5/9

Germany:

NILOS GmbH & Co. KG
Reisholzstr. 15
40721 Hilden • Germany
Phone: +49 2103 951 - 0
Fax: +49 2103 951 - 209
info@nilos.de
www.nilos.de

NILOS GmbH & Co. KG
Niederlassung Kraftwerke
Kraftwerk Boxberg
02943 Boxberg • Germany
Phone: +49 35774 32 - 036
Fax: +49 35774 32 - 125
Mobile: +49 170 5763151
info-boxberg@nilos.de

NILOS GmbH & Co. KG
Niederlassung Tagebau
Schadendorfer Str. 52
02943 Kringelsdorf OT
Kringelsdorf • Germany
Phone: +49 35774 55 - 482
Fax: +49 35774 55 - 483
Mobile: +49 170 5763151
info-lausitz@nilos.de

M & Z Förderband- und
Anlagenservice GmbH
Spreetaler Str. 4
02979 Elsterheide • Germany
Phone: +49 35774 55 - 482
Fax: +49 35774 55 - 483
Mobile: +49 170 5763151
info-elsterheide@nilos.de

NILOS GmbH & Co. KG
Montagebereich
Kraftwerk Schwarze Pumpe
An der alten Ziegelei
03130 Schwarze Pumpe
Germany
Phone: +49 3564 3188 - 46
Fax: +49 3564 3788 - 91
Mobile: +49 170 5763151
info-schwarzepumpe@nilos.de

NILOS GmbH & Co. KG
Montagebereich
Kraftwerk Jänschwalde
Halle W8
03182 Peitz • Germany
Phone: +49 35601 31 - 805
Fax: +49 35601 31 - 805
Mobile: +49 170 5763151
info-jaenschwalde@nilos.de

NILOS Förderband GmbH
Str. zur Freiheit 2
06729 Elsteraue • Germany
Phone: +49 34424 230 - 00
Fax: +49 34424 230 - 50
Mobile: +49 171 8539432
info-profen@nilos.de

NILOS Deuna
Industriestr. 7
37355 Deuna • Germany
Phone: +49 36076 44722
Fax: +49 36076 40 848
Mobile: +49 171 2134749
info-deuna@nilos.de

NILOS Serviceteam
Rheinland
Reisholzstr. 15
40721 Hilden • Germany
Phone: +49 2103 951 - 115
Fax: +49 2103 951 - 179
Mobile: +49 172 2088358
info-rheinland@nilos.de

NILOS Niederrhein
Industriestr. 10
46499 Hamminkeln • Germany
Phone: +49 2852 2401
Fax: +49 2852 968603
Mobile: +49 173 5304592
info-niederrhein@nilos.de

NILOS Neuwied
Auf dem Höhchen 19
56587 Oberhonnefeld • Germany
Phone: +49 26 34 9814 - 27
Fax: +49 26 34 9814 - 38
Mobile: +49 174 3422738
info-neuwied@nilos.de

NILOS Mannheim
Koblenzer Str. 9–11
68309 Mannheim • Germany
Phone: +49 621 7238 - 69
Fax: +49 621 7238 - 64
Mobile: +49 172 2965012
info-mannheim@nilos.de

NILOS Bayern
Industriestr. 9
93142 Maxhütte-Haidhof • Germany
Phone: +49 9471 205 - 22
Fax: +49 9471 205 - 54
Mobile: +49 173 2971534
info-bayern@nilos.de

Europe:

NILOS Austria GmbH
Franz-Sauer-Str. 48
5020 Salzburg • Austria
Phone: +43 662422082
Fax: +49 865467837
Mobile: +43 6642420233
info@nilos.at

NILOS HELLAS M.E.P.E.
Kataskevi - Episkevi
- Imanton - Metaforas
2nd Km Ptolemaida-Kozani
P.O. Box 185
50200 Ptolemaida • Greece
Phone: +30 2463055 - 751
Fax: +30 2463055 - 752
Mobile: +30 697905818
info@nilos.gr

Lambertini S.r.L.
Via C. Beccaria 12
37036 S. Martino B.A. (VR) • Italy
Phone: +39 045 8781148
Fax: +39 045 995429
info@lambertinisrl.com

NILOS Polska Sp. z.o.o.
ul. Kosynierów 38
41219 Sosnowiec • Poland
Phone: +48 327 007797
Phone: +48 327 2940626
Fax: +48 322907730
biuro@nilospolska.pl
www.nilospolska.pl

JUNCOR-Acessórios
Industrias e Agrícolas, S.A.
Rua António Silva Marinho, 66
4100-063 Porto • Portugal
Phone: +351 226197 - 360
Fax: +351 226197 - 361
compras@juncor.pt

JUNCOR-Acessórios
Industrias e Agrícolas, S.A.
„Montijo Comercio e Industria“
Armazéns 13 e 15
Estrada Nacional n° 5
Pau Queimado - Afonsoeiro
2870-500 Montijo • Portugal
Phone: +351 212306 - 030
Fax: +351 212306 - 031
vendaslisboa@juncor.pt

MASANÉS Suministros
Industriales, S.A.
Polígono Industrial El Segre
C/Josep Baró Travé
Parcelas 106 y 107
25191 Lleida • Spain
Phone: +34 97321 - 6061
Fax: +34 97321 - 2258
industria@masanes.com

ALEV Lastik Sanayi ve Ticaret A.S.
Bayar Cad. 72/9
34742 Kozyatağı-Istanbul • Turkey
Phone: +90 21641072 - 84 / -85
info@alevgroup.com

Speedbird Supplies Ltd
15 Thistledown Drive
Ixworth, Bury St Edmunds,
Suffolk IP31 2NH • United Kingdom
Phone: +44 1359 - 232667
Fax: +44 1359 - 300200
Mobile: +44 7791 394143
ben.lord@speedbird-supplies.co.uk
www.speedbird-supplies.co.uk

Registered Offices

Asia/Australia:

NILOS (SHANGHAI)
VULCANIZATION CONVEYOR SYSTEMS CO., LTD
Qi Luo Road 189, Building No. 6
Shanghai 200436 • China
Phone +86 2162842 - 186
Fax +86 262842 - 133
nilos@nilossh.com
www.nilossh.com

CONVEYOR PRODUCTS Pty Ltd.
Unit 9, 31 Gardens Drive Willawong
QLD 4110 • Commonwealth of Australia
Phone: +61 0732726 - 840
Fax: +61 0732726 - 864
Mobile: +61 0419749759
phil.boike@conveyorproducts.com.au

NILOS ASIA (Conveyor Solutions) PTE LTD
Bukit Timah Post Office
P.O. Box 114
Singapore 915804 • Republic of Singapore
Mobile: +65 81890998
karsten@nilosasia.com

Latin America:

INDUSTRIAS MONTEFIORE S.A.I.C.
Luzuriaga 345/61
1280 Buenos Aires • Argentina
Phone: +54 114 0165555
Fax: +54 114 3051201
+54 114 3064294
dirección@montefiore.com.ar

NILOS CHILE LTDA.
Avenida General Velásquez 890
Piso 5° - Oficina 506
Antofagasta • Chile
Phone: +56 55592 - 593
Fax: +56 55592 - 596
ventas@niloschile.cl
www.niloschile.cl

ROEDA S.A.
Av. Brasil No. 203
Apartado 3122
Lima 1 • Peru
Phone: +51 13151414
Fax: +51 13326956
roeda@roeda.com.pe
www.roeda.com.pe

GAITAN International Trading, Inc.
19666 N.W. 84th Place
Miami, Florida 33015 • USA
Phone: +1 7864405 - 169
+1 9542294766
Fax: +1 7864405 - 169
info@gaitanintl.com

Africa:

EURL DEPROF
No. 63 Lot 87 Emir Abdel Kader
Sidi Chami - 31047
Oran • Algeria
Phone/Fax:
+213 417541 - 62 / - 64 / - 65
eurldeprof@gmail.com

GENISERVICES
Nouakchott Mauritanie
I LOT L No. 193
P.O. Box 2280
Nouakchott • Mauritania
Phone: +222 452 19919
Fax: +222 452 42705
geniservices@yahoo.fr

SOGERMA S.A.
20, Boulevard de Paris
20000 Casablanca • Morocco
Phone: +212 222 72387
+212 222 27969
Fax: +212 222 02475
ste_sogerma@yahoo.fr

M. Modou CISSÉ
VILLA N° 53, Keur Yaraka km 7,5
Boulevard du Centenaire
de la Commune de Dakar
Dakar • Senegal
Phone/Fax: +221 338321344
Mobile: +221 763904407
+221 771479961
mc.ndiarmeo@orange.sn

Veyance Technologies
Africa (Pty) Ltd
100 Northern Parkway Road
Ormonde 2091
Johannesburg • South Africa
Phone: +27 112489 - 300
Fax: +27 112489 - 380
paul_vanzyl@veyance.co.za

Vision Engineering Co.
Head Office:
11 Abd El Hamad Showman
St Nasr City, Cairo
Cairo Office:
7 Mohsen Roshdy
St Nasr City, Cairo
Egypt
Phone/Fax: +202 22905188
Mobile: +2010 20200214
info@univisionegypt.com
www.univisionegypt.com

Middle East:

AL-GHANEM Trading & Contracting Co.
Amman Commercial Complex
Ommaya Street, Al-Abdali
P.O. Box 7109
Amman 11118
Hashemite Kingdom of Jordan
Phone: +962 65696 - 500
Fax: +962 65656 - 750
Mobile: +962 777466544
mail@alghanem.com.jo
sghanem@wanadoo.jo

GUMMI EXPRESS
HaShoftim St 17
44341 Kfar Saba • State of Israel
Phone: +972 39368 - 111
Fax: +972 39368 - 112
gomi54@bezeqint.net

ServTech International Company
Techno-Q Building, 1st Floor, Room No: 7
Salwa Road, Decoration Round About
P.O. Box 22570
Doha • State of Qatar
Phone: +974 4500 - 177
Fax: +974 4500 - 188
Mobile: +974 5164142
servtech@qatar.net.qa

Baltic States:

NILOS HELLAS M.E.P.E.
Kataskevi - Episkevi - Imanton - Metaforas
2nd Km Ptolemaida-Kozani
P.O. Box 185
50200 Ptolemaida • Greece
Phone: +30 2463055 - 751
Fax: +30 2463055 - 752
Mobile: +30 697905818
info@nilos.gr

Zlatarov Co.
99 "Sava Silov" Street
6000 Stara Zagora • Bulgaria
Phone: +359 4225 - 1025
Fax: +359 4225 - 7019
zlatarov@abv.bg

Taurus Techno Kft.
Pesi út. 8-12
1173 Budapest • Hungary
Phone: +36 12535 - 031
Fax: +36 12535 - 030
kethely@taurustechno.hu

NILOS GmbH & Co-Dega ne Kosove
Isa Kastrati pn
10000 Pristina • Kosovo
Mobile: +377 44149836
ngashiko@yahoo.de

„Industrija 4B" d.o.o. Kakanj
Obre b.b.
72240 Kakanj • Republic of
Bosnia and Herzegovina
Phone: +387 32553793
Fax: +387 32775395
jasmina.industrija4b@hotmail.com

S.C. MET CONSULTING S.R.L.
Str. Avram Iancu (Petuniei) Nr. 2B
407280 Communa Floresti jud. Cluj • Romania
Phone: +40 364116254
office@metconsulting.ro

Trakon d.o.o.
Markovic Zelemir
ul. Kraljevacka 6
11300 Smederevo • Serbia
Phone: +381 26640 - 590
Fax: +381 26640 - 592
trakon@open.telekom.rs

East:

NILOS EURASIA GmbH
Reisholzstr. 15
40721 Hilden • Germany
Phone: +49 2103 951 - 225
Mobile: +49 172 4545722
abdurasul.ishimov@nilos.de

NILOS CS s.r.o.
Obchodni 25
Velebudice
43401 Most • Czech Republic
Mobile: +420 602192002
nilos@volny.cz
www.nilos.cz

NILOS Kasachstan
Nurkena Abdirova Str. 3
Office 705
100009 Karaganda • Kazakhstan
Phone: +7 7212425 - 502
Fax: +7 7212425 - 449
Mobile: +7 7017658818
sergeyf@phoenix-ag.kz

OOO Novotrans
Electtricatsyi Str., h.3
140014 Lyubertsy • Russia
Phone/Fax: +7 4957404964
Mobile: +7 9166832414
novotrans2011@yandex.ru

OOO „PKP" ChTTM"
Pr. Lenina 83
454080 Cheljabinsk • Russia
Phone: +7 3512 718186
Fax: +7 3512 653646
Mobile: +7 9128979528
pkp.ttm74@mail.ru

Dorstrojtechnologija
Tokareva d. 18, g. Sestrorezk a/ja 76
197706 St. Petersburg • Russia
Phone/Fax: +7 8122440 - 566
Mobile: +7 911313880
boorer@mail.ru

Burtowoj A.G.
Dimitrowa 49/29
50027 Kriwoj Rog • Ukraine
Mobile: +38 0503345946
burtovoy_wagener@i.ua

OOO Luidor
Tsentralnaya Str. 1A, k 40
220021 Minsk • White Russia
Phone/ Fax: +375 172428372
Mobile: +375 296137573
luidor@gmail.com

Memo

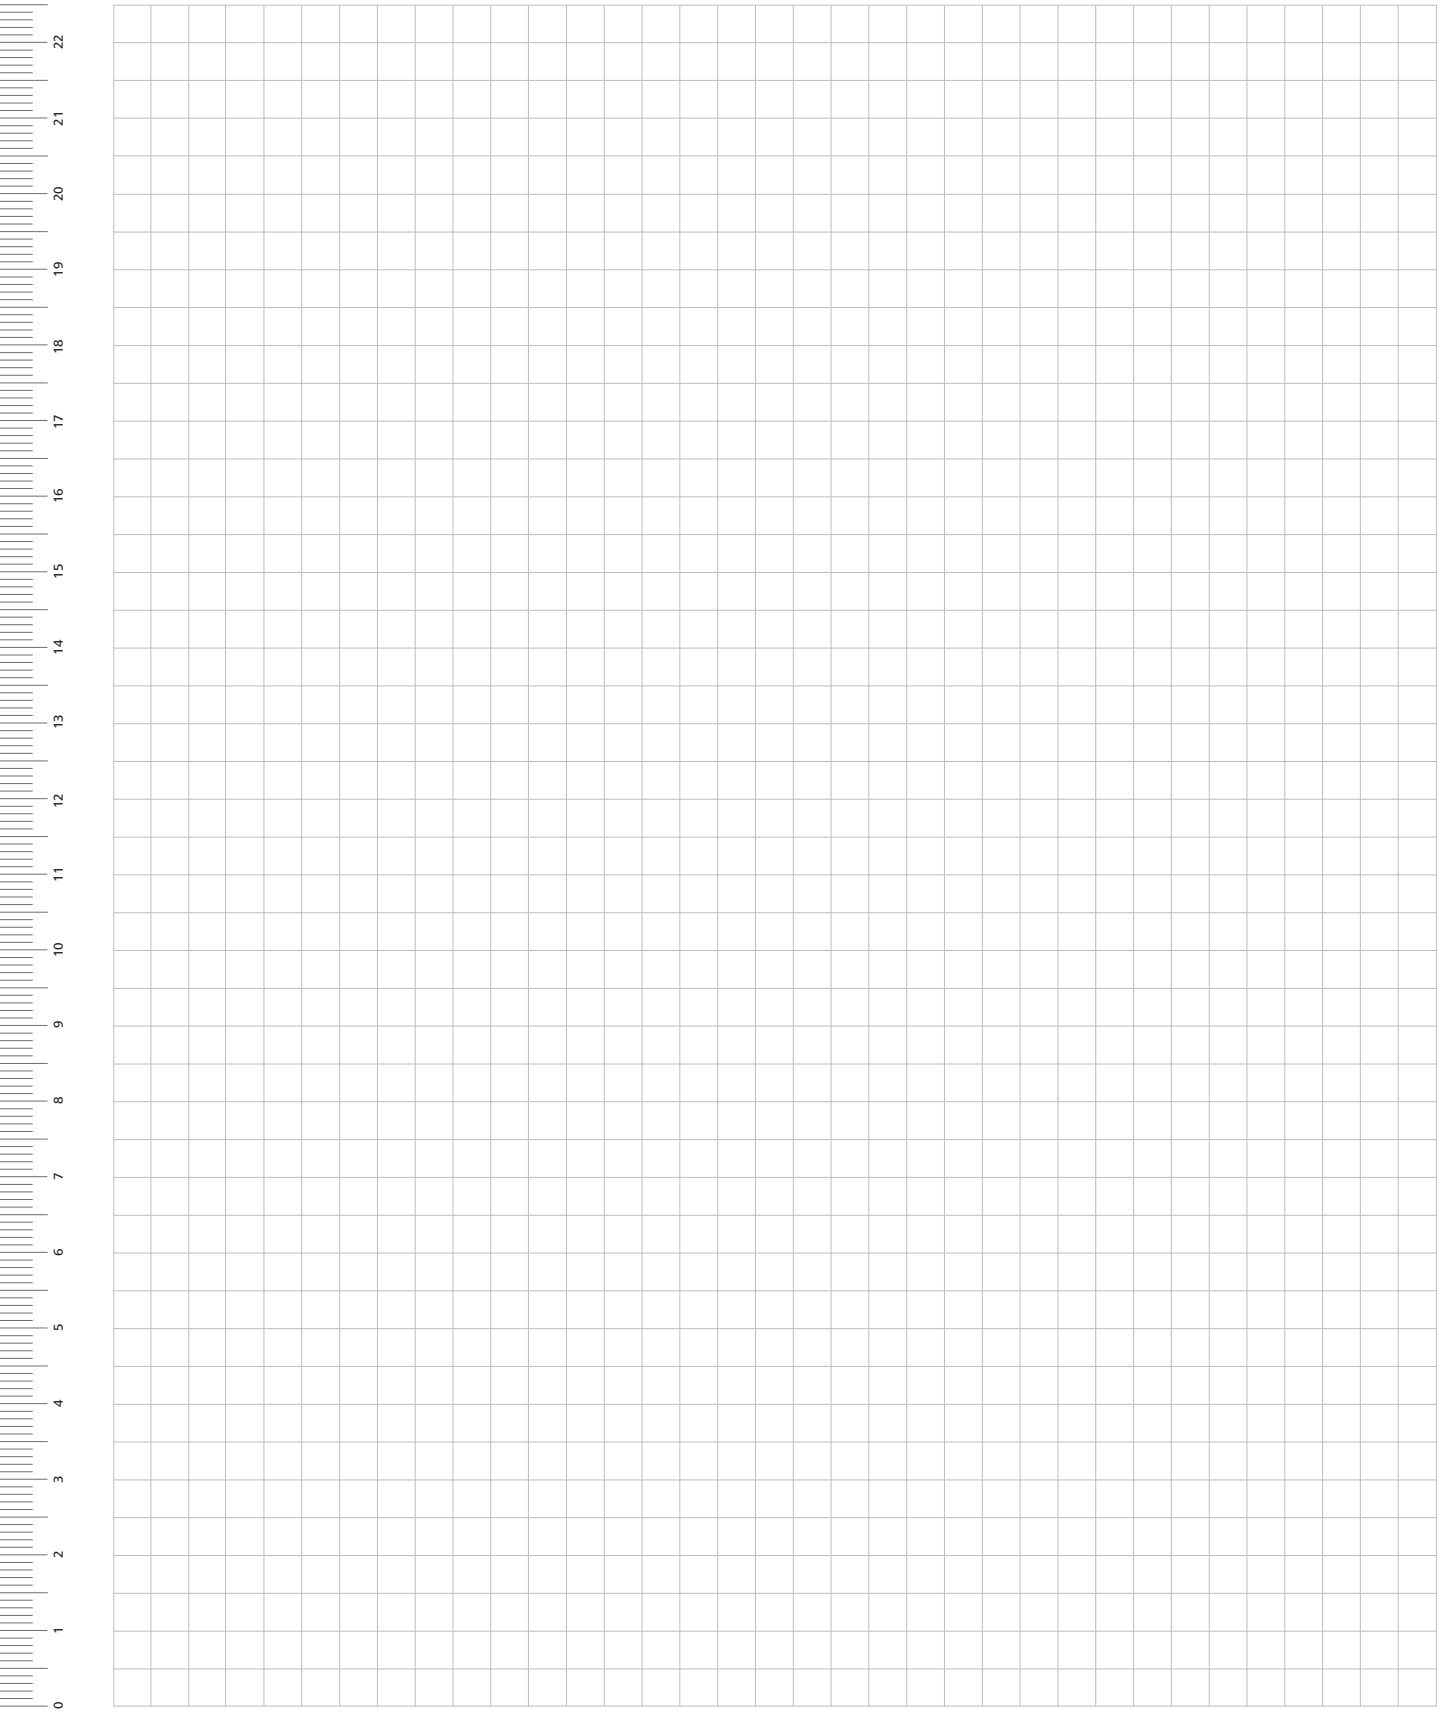

Scan QR-Code and load
the complete Catalogue.

The technical information is based on latest state of technology.
We reserve the right to make structural and design changes in the interest of progress. We ask for your understanding that no liability can be assumed for printing errors or mistakes. Reproduction or reprinting, in whole or in part, is not permitted without our express permission.

NGK-0416_EN
This renders all previous instructions invalid.

NILOS GmbH & Co. KG
Reisholzstr. 15
40721 Hilden · Germany
Phone: +49 2103 951 - 0
Fax: +49 2103 951 - 209
info@nilos.de
www.nilos.de