

siegling
belting

WOOD BASED PANELS MANUFACTURE





You can find information on further Forbo Siegling products relevant to the wood processing industry in the following brochures:

- | No. | Title |
|-----|---|
| 215 | Siegling Transilon – Standard product range |
| 224 | Siegling Transilon Conveyor and processing belts |
| 317 | Siegling Transilon Technical information 1
Storage, finishing, fitting |
| 318 | Siegling Transilon Technical information 2
Special features and properties |

CONVEYING AND PROCESSING WOOD EFFICIENTLY

Forbo Siegling products used in wood-panel manufacturing are the result of specific research and close collaboration with OEMs and users for over 50 years. Which is why our sophisticated belting products can help you exploit the potential of your production machinery to the full and minimize scheduled and unscheduled downtime.

Splicing equipment and straightforward splicing methods make on-site splicing and handling child's play. The belts have long service lives and are easy to track – saving time and costs.

More than 300 service points worldwide ensure spare parts and services.

siegling transilon
conveyor and processing belts




siegling transvent
ventilation belts




siegling extremultus
flat belts



FORBO SIEGLING'S BELTS FOR WOOD BASED PANELS MANUFACTURE

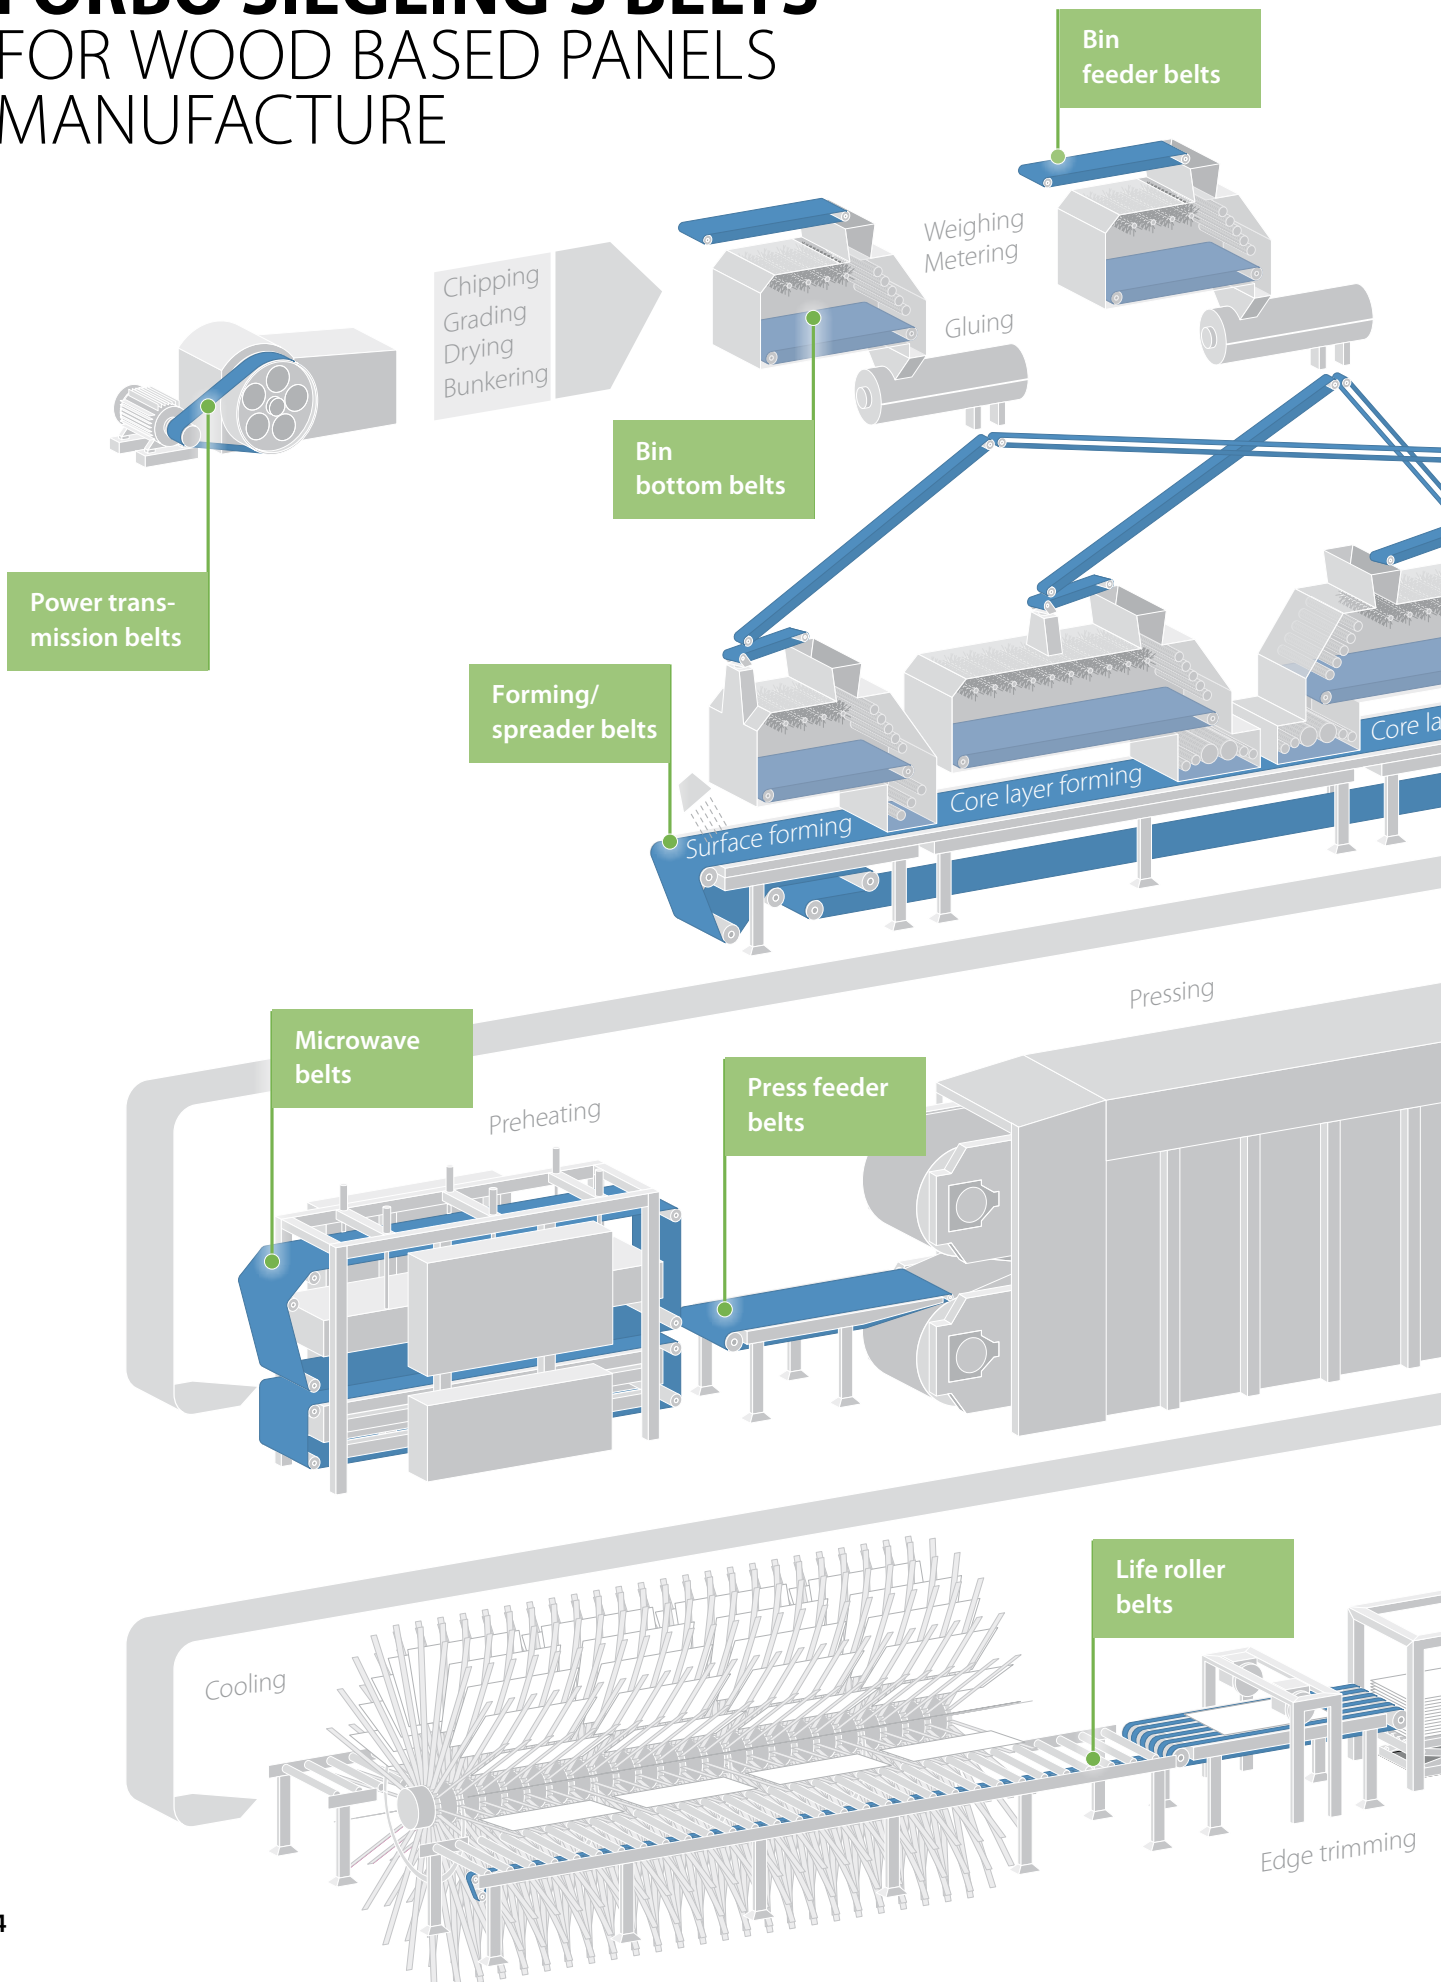

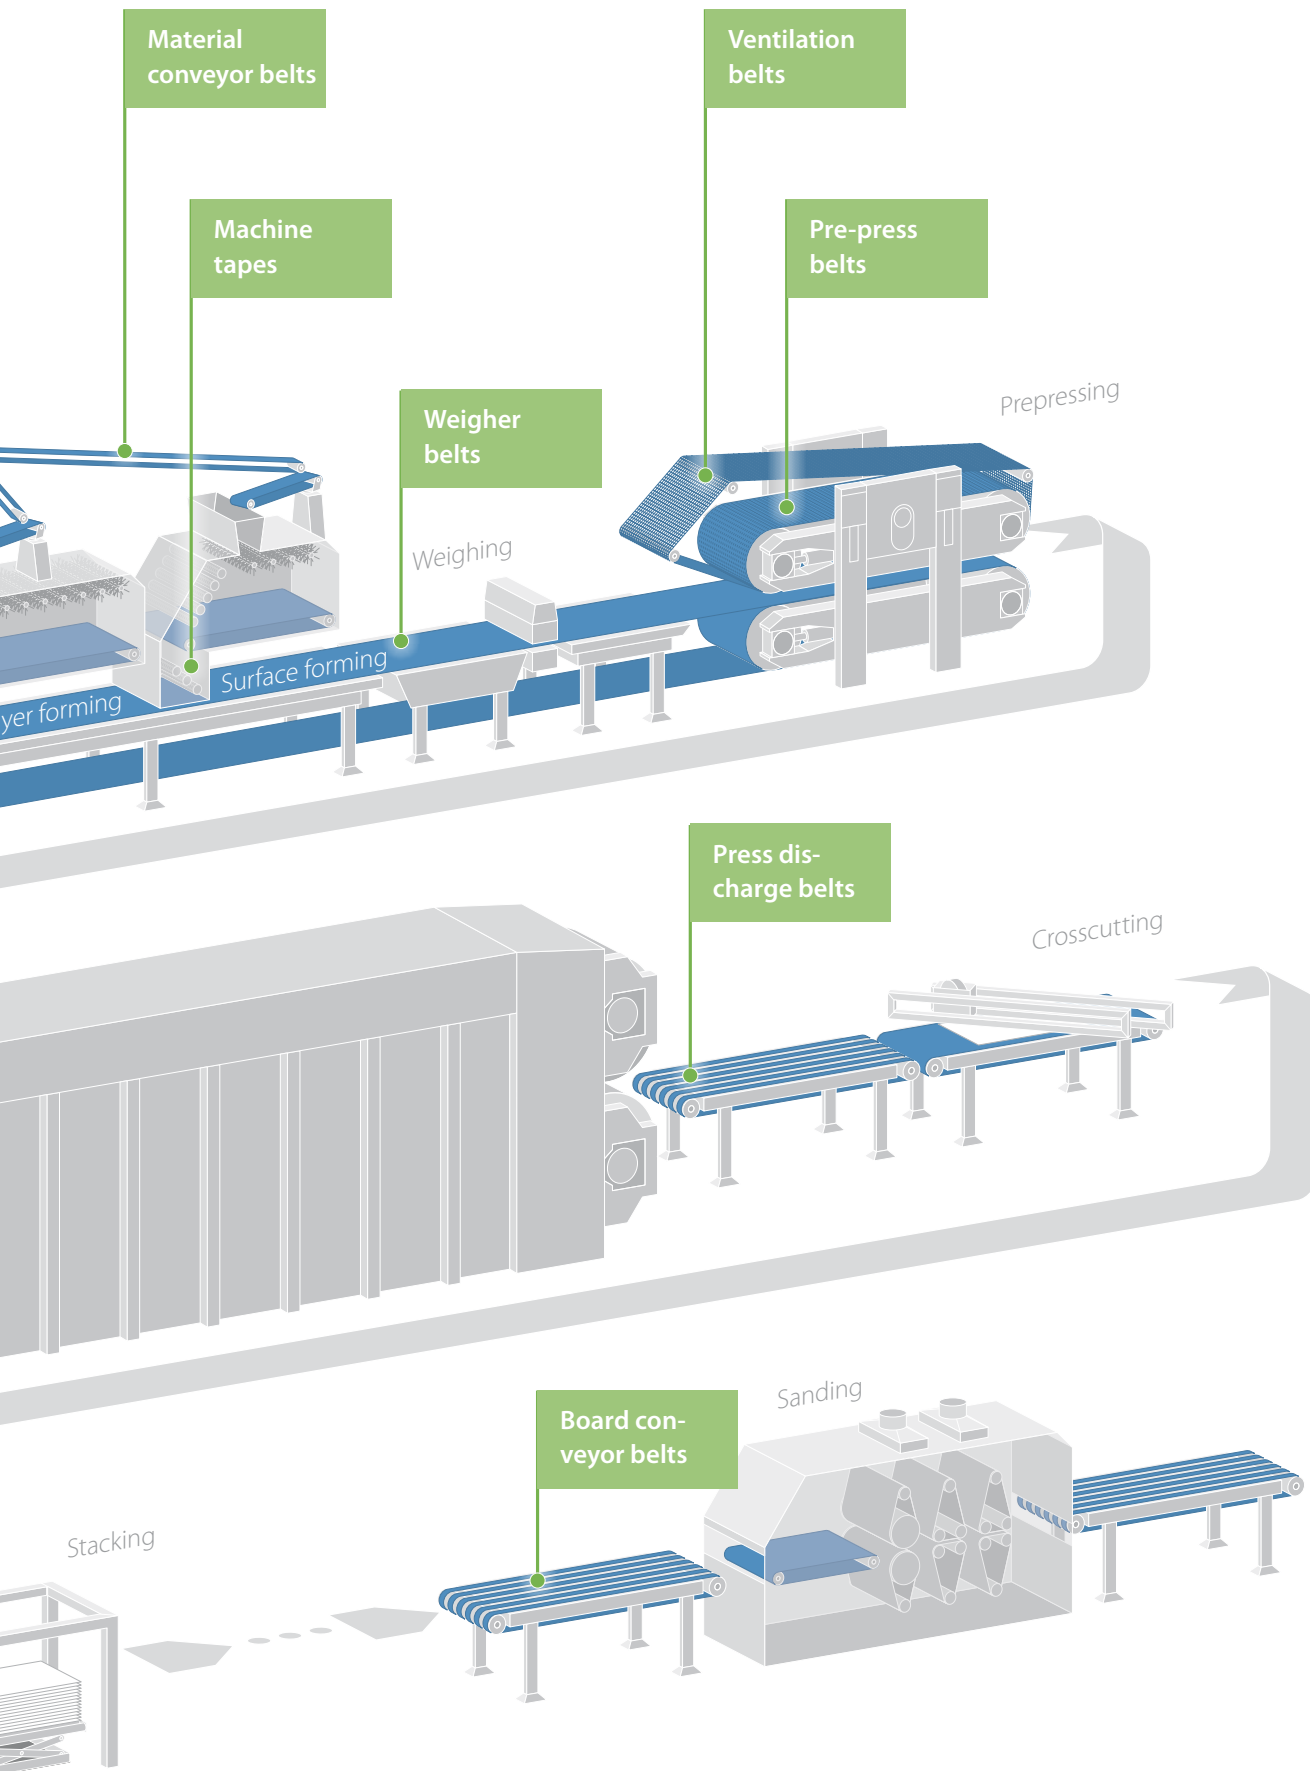

CONVEYOR AND PROCESSING BELTS FOR BOARD PRODUCTION



Power transmission belts for wood preparation

The tension members in the various materials (even in truly endless types) are embedded in a thermoplastic intermediate layer. Highly elastic elastomer, urethane, chrome leather, polyamide, polyester or blended fabrics are used as coatings. Compared with other power transmission products, Siegling Extremultus power transmission belts stand part for their better efficiency ($\geq 98\%$), accurate and even tracking plus easy handling.

- Consistent speeds
- Long service lives
- Short take-up ranges, little creep
- Good damping characteristics
- Superior strength up to 1850 kW
- Bevel- and taper-cone drives

Conveyor, metering and bin floor belts

The wide range of Siegling Transilon belts make any type of cleaning, sieving, metering and gluing jobs possible.

Depending on type, the belts can be customized for special tasks (also as a combination) with:

- Urethane, PVC and silicone coatings
- Good release characteristics
- Patterned top faces for inclined conveying
- Profiles on the top face and underside to seal edges in silos or to act as guides
- Flexible and highly accurate Z-splices
- Especially low fluctuations in splice thickness and weight for check-weigher belts
- Mechanical fasteners

Former, accelerator and transfer belts

The tension member made of HighTech-fabric provides a linear, steep load/extension curve. The top face has a microscopically thin, matt coating. All of the belt is very thin and manufactured with low weight tolerances ($< \pm 1\%$).

- Minimal load on the chip mat lengthways
- No caking of the chip mat
- Precise manufacture of thin sheets
- Very flexible lengthways
- No elongation during constant operation
- Very good directional stability properties
- Very short lead times, rapidly reaches dynamic operational condition
- Does not tend to deform after standing still for a long time on the drums
- Highly laterally stiff
- Flexible Z-splice
- Highly resistant to hydrolysis
- Best release properties, high release



Pre-press belts

Forbo Siegling pre-press belts have a highly modular tension member, made of aramide fabric with a tensile force of approx. 140 N/mm at operational elongation. So they are suitable for heavy pre-presses with a nip pressure of up to 3000 N/cm and belt pull of up to 1800 N/cm.

- Minimal expansion of the mat between the pressure rollers
- Minimal load on the chip mat lengthways
- Very durable surface
- Low creep
- Very short take-up ranges.

Differences in the thickness of the mat and the resulting different tensile forces over the width of the belt or the lateral forces occurring as a result of the belt tracking are compensated for by

- Higher level of lateral stiffness and
- Higher level of resistance to diagonal warping.



Ventilation belts

The Forbo Siegling ventilation belts for pre-presses consist of a special blended fabric that is durable and strong. They have a high proportion of warp threads, are highly air permeable and have a very smooth surface.

The extremely strong Z-splice, developed by Forbo Siegling leaves absolutely no marks:

- No electrostatic build-up and lower fire risk, uninterrupted production
- No adhesion of chips/fibers
- Excellent ventilation of the chip mat/fiber mat
- Very good surface quality of the boards
- Reliable splice
- Different splicing techniques



Conveying and processing

For the subsequent conveying and processing of the boards Siegling Transilon conveyor and processing belts and Siegling Extremultus live roller power transmission belts with different properties are used. From robust all-rounders right up to absolute specialists.

The belts must have low elongation, be durable and need little maintenance for simple conveying tasks and when cutting to size.

In finishing (veneering, varnishing, coating) the demands rapidly increase: the belts used must be able to position accurately, be resistant to heat and solvents and easy to clean.

SIEGLING TRANSILON

CONVEYOR AND PROCESSING BELTS


	Article number	Total thickness approx. [mm]	Weight approx. [kg/m ²]	Pull at 1 % elongation (k ₁ relaxed) approx. [N/mm width]*	Max. belt width [mm]	d _{min} approx. [mm]**	Permissible operating temperature [°C]	Surface hardness [Shore A]	Surface	Properties/ applications
--	----------------	------------------------------	-------------------------------------	---	----------------------	---------------------------------	--	----------------------------	---------	--------------------------

Siegling Transilon										
E 3/2 U0/U0 transparent FDA	900009	1.20	1.10	4.50	4600	40 (3*)	-30/+100	-	Fabric texture	Laterally stiff
E 4/2 A0/A2 MT-HACCP white FDA	906660	1.30	1.15	5.00	3000	60 (5*)	-10/+70	92	Matt surface	Laterally stiff to a limited extent
E 4/2 S0/S3 FSTR white FDA	900136	1.50	1.60	4.50	3100	40 (6*)	-40/+180	30	Fine texture	Laterally stiff
E 8/2 U0/V5 green	900025	2.10	2.50	7.50	4600	30	-10/+70	75	Smooth surface	Laterally stiff
E 8/2 U0/V5H MT black	900026	2.20	2.50	7.50	4600	40	-10/+70	85	Matt surface	Laterally stiff
E 8/2 U0/V20 AR green	900037	4.90	4.00	6.00	1500	40	-10/+70	45	Anti-skid	Laterally stiff, incline conveying
E 8/2 0/V5H S/MT black	996141	2.20	2.50	8.00	4500	40	-10/+70	85	Matt surface	Laterally stiff
E 8/2 U0/U2 MT-NA white FDA	900277	1.40	1.45	6.50	3100	24	-30/+100	85	Matt surface	Laterally stiff
E 8/2 X0/A2 MT-HACCP white FDA	906776	1.70	1.50	9.50	3000	60 (5*)	-10/+70	90	Matt surface	Laterally flexible
E 12/2 U0/V7 green	900045	2.85	3.40	10.50	4650	60	-10/+70	75	Smooth surface	Particularly laterally stiff
E 12/2 U0/G20 AR black	906447	5.50	4.00	7.00	1450	90	-30/+100	65	Anti-skid	Laterally stiff, incline conveying
E 12/2 U0/G20 AR green	906217	5.50	4.00	8.00	1450	90	-30/+100	65	Anti-skid	Laterally stiff, incline conveying
E 12/2 U0/U2 MT blue FDA	906782	1.70	1.80	12.50	4200	20 (8*)	-30/+100	85	Matt surface	Laterally stiff, resistant to hydrolysis
E 12/2 U0/V20 green	900262	3.35	4.10	10.50	3000	60	-10/+70	75	Smooth surface	Particularly laterally stiff
E 18/H U0/U2 MT white FDA	906420	1.75	1.75	17.50	4750	20 (8*)	-30/+100	85	Matt surface	Laterally stiff
E 18/3 U0/V20 green	900088	4.80	5.70	16.00	3000	125	-10/+70	75	Smooth surface	Laterally stiff
E 18/3 U0/V/U2H MT green	900174	2.80	3.20	26.00	3000	150	-10/+70	90	Matt surface	Laterally stiff
E 44/3 U0/V20 green	999995	5.00	7.00	27.00	3000	160	-10/+70	75	Smooth surface	Laterally stiff
AE 140/3 U0/U4H MT black	906441	3.70	4.20	75.00	4400	225	-30/+100	92	Matt surface	Particularly laterally stiff
NOVO 25 HC black	900195	2.70	1.45	7.00	2000	40	-10/+120	-	Polyester felt	Laterally stiff
NOVO 40 HC black	900221	4.00	2.20	7.50	2000	90	-10/+120	-	Polyester felt	Laterally stiff
NOVO 40 NA green	900222	4.00	2.20	7.50	2000	90	-10/+120	-	Polyester felt	Laterally stiff
NOVO 60 HC black	900286	5.50	3.00	8.00	2000	125	-10/+120	-	Polyester felt	Laterally stiff to a limited extent

The properties

The advantages

low elongation	▶	short take-up ranges, space-saving
longitudinally flexible	▶	small drum diameters possible
dimensions do not alter	▶	maintenance-free, no re-tensioning
low noise during operation	▶	improved working conditions
durable	▶	economical operation
lightweight with low overall thickness	▶	easy to handle/to put into operation

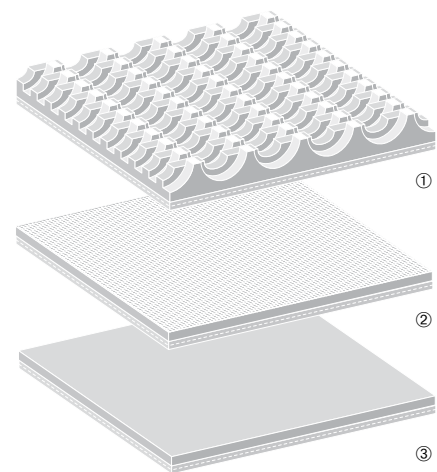


Melt splice	Mechanical splice	Material conveyor belt	Bin feeder/bin bottom belt	Check-weigher belt	Forming/spreader belt	Pre-press belt	Acceleration belt	Microwave belt	Press feeder belt	Press discharge belt	Board conveyor belt
-------------	-------------------	------------------------	----------------------------	--------------------	-----------------------	----------------	-------------------	----------------	-------------------	----------------------	---------------------

Please note: the values stated are nominal and can fluctuate in a belt whose width is a result of production processes. Our products are constantly adapted to market requirements. Consequently, changes in technical parameters can occasionally occur. Therefore, please see the current product data sheets for specific information on designs and calculations.

Z; ZS	KS; HS; CS						●		●		●
Z; ZS	KS; HS; CS							●			
Z; ZS	KS; HS; CS			●					●		●
Z; ZS; S	KS; HS; CS	●	●	●							●
Z; ZS; S	KS; HS; CS	●	●								●
Z; ZS; S	KS; HS; CS	●	●				●				●
Z; ZS; S	KS; HS; CS	●	●				●				●
Z; ZS; S	KS; HS	●	●	●	●		●			●	●
Z; ZS	CS			●				●			
Z; ZS; S	KS; HS; CS	●	●		●		●		●		●
Z; ZS; S	KS; HS; CS									●	
Z; ZS; S	KS; HS; CS									●	
Z; ZS; S	KS; HS; CS	●	●	●	●		●		●		●
Z; ZS; S	KS; HS; CS	●	●								●
Z	KS; CS	●	●	●	●		●		●		●
Z; ZS; S	KS; HS; CS	●	●								●
Z; S	HS; CS	●	●								●
S	HS; CS	●	●								
Z	HS; CS					●					
Z; K	KS; HS; CS	●								●	●
Z; K	KS; HS; CS	●								●	●
Z; K	KS; HS; CS	●								●	●
Z; K	KS; HS; CS	●								●	●

Type code

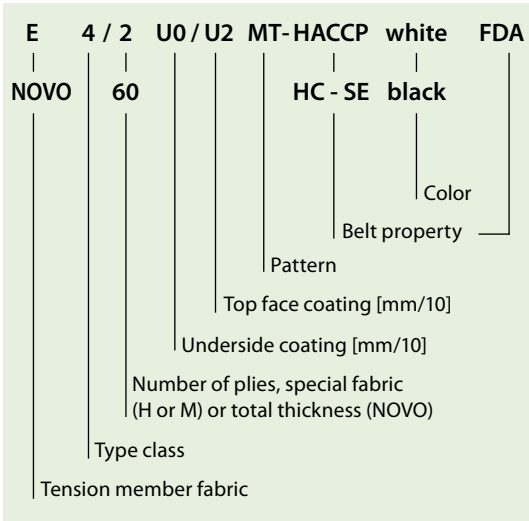

* Established in line with ISO 21181:2005
 ** The smallest permissible drum diameters were established at room temperature with z-splices and counter bending and do not apply to conveyor belts with mechanical fasteners. Lower temperatures, profiles and side walls can require larger drum diameters.

Tension member fabric

- AE = Aramide/polyester blended fabric
- E = Polyester
- NOVO = Polyester felt

Design

- 1, 2, 3 = Number of fabric plies
- H = HighTech-fabric

Coatings

- A = Polyolefin
- G = Rubber/elastomer
- G...H = Rubber/elastomer hard
- S = Silicone
- U = Polyurethane
- U...H = Polyurethane hard
- V = Polyvinyl chloride
- V...H = Polyvinyl chloride hard
- 0 = Fabric uncoated
- U0, E0, A0, S0, Y0, UH = Polyurethane impregnation

Patterns

- AR = Rough-top ①
- FSTR = Fine texture ②
- MT = Matt ③


Belt properties

- FDA = Food safe in compliance with EC/FDA (see data sheet)
- HACCP = Supports the HACCP concept
- HC = Highly-conductive

Splicing techniques


- Z = Z-splice
- ZS = Stepped Z-splice
- S = Overlap splice
- CS = Clamp fasteners
- HS = Wire hook fasteners
- KS = Plastic fasteners

SIEGLING TRANSVENT VENTILATION BELTS

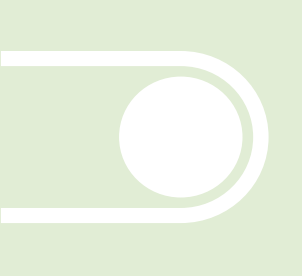	Article number	Total thickness approx. [mm]	Weight approx. [kg/m ²]	Pull at 1 % elongation (k ₁ relaxed) approx. [N/mm width]*	Max. belt width [mm]	d _{min} approx. [mm]**	Permissible operating temperature [°C]	ATEX category (Zone)	Air permeability m ³ /m ² x h at Pa 200	Air permeability [cfm] at Pa
Siegling Transvent										
Transvent W01 blue	900403	1.90	1.40	7	4500	200	-30/+100	3G3D (2/22)	8940	375 Pa 124.5
Transvent W02 blue	900442	1.95	1.55	7	4500	200	-30/+100	3G3D (2/22)	9900	425 Pa 200
Transvent W03 blue	900441	1.85	1.55	18	4500	160	-30/+100	3G3D (2/22)	7920	425 Pa 124.5

Splicing techniques

- ① Woven splices (supplied endless)
- ② Woven pin splice
- ③ Pin splice
- ④ Z-splice
- ⑤ Hook splice

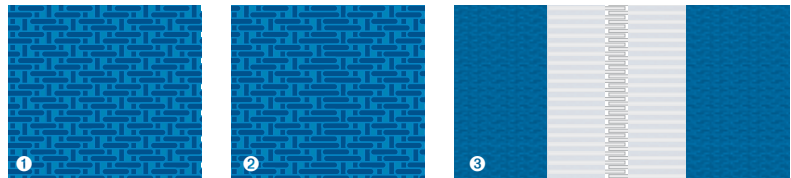

SIEGLING EXTREMULTUS FLAT BELTS

	Article number	Total thickness approx. [mm]	Weight approx. [kg/m ²]	Standard width supplied [mm]	d _{min} approx. [mm]**	Permissible operating temperature [°C]	Pull at 1 % elongation (k ₁ relaxed) approx. [N/mm width]*	Nominal working elongation [% of belt length]	Shaft load at 1 % elongation [N/mm belt width]
Siegling Extremultus									
GG 14P-50 green	850326	6.00	6.65	500	60	-20/+70	20	0.3–2.0	23
GG 15P-22 NSTR/FSTR gray/black	855605	2.50	2.70	500	40	-20/+70	25	0.3–1.0	55
GG 20P-25 NSTR/FSTR gray/black	855606	2.50	2.75	500	30	-20/+70	30	0.3–2.0	30
GG 20E-20 green	822052	2.00	2.15	500	24	-20/+70	20	0.3–2.0	23
GG 20E-30 green	855538	3.00	3.40	500	40	-20/+70	20	0.3–2.0	23
GG 30E-32 green	822051	3.20	3.40	500	40	-20/+70	22	0.3–2.0	23
GG 30E-32 FSTR/FSTR black	822118	3.30	3.55	500	40	-20/+70	26	0.3–2.0	30
TG 30E-30 black/green	822058	3.00	3.20	500	40	-20/+70	30	0.3–2.0	20
GT 40E black	810032	2.40	2.50	480	160	-20/+60	40	0.5–1.5	80
GT 54P black	850050	4.50	4.90	510	300	-20/+80	54	1.5–3.0	54
GT 80P black	850051	6.00	6.40	510	400	-20/+80	80	1.5–3.0	80



	Surface top face/underside	Melt splice	Mechanical splice	Ventilation belt
--	----------------------------	-------------	-------------------	------------------

	Fabric texture	Z	HS; endless, woven pin splice	●
	Fabric texture	Z	HS; endless, pin splice	●
	Fabric texture	Z	HS; endless; pin splice; woven pin splice	●

Please note: the values stated are nominal and can fluctuate in a belt whose width is a result of production processes. Our products are constantly adapted to market requirements. Consequently, changes in technical parameters can occasionally occur.
Therefore, please see the current product data sheets for specific information on designs and calculations.

* Established in line with ISO 21181:2005

** The smallest permissible drum diameters were established at room temperature with z-splices and counter bending and do not apply to conveyor belts with mechanical fasteners. Lower temperatures, profiles and side walls can require larger drum diameters.



Z = Z-splice

HS = Wire hook fasteners

	Surface topface	Surface underside	Splice	Carrier belts	Live roller belts	Power transmission belts	Machine tapes
--	-----------------	-------------------	--------	---------------	-------------------	--------------------------	---------------

	Normal texture	Normal texture	K	●			
	Normal texture	Fine texture	K			●	
	Normal texture	Fine texture	K			●	
	Normal texture	Normal texture	Z		●	●	●
	Normal texture	Normal texture	Z	●	●	●	●
	Normal texture	Normal texture	Z	●	●	●	●
	Fine texture	Fine texture	Z	●	●	●	●
	Normal texture	Fabric texture	Z	●	●		●
	Fabric texture	Normal texture	Endless			●	●
	Fabric texture	Normal texture	K			●	●
	Fabric texture	Normal texture	K			●	●

* The smallest permissible pulley diameters were established in standard ambient conditions (23 °C, 50% rel. humidity). Lower temperatures require larger drum diameters.

** The nominal effective pull states the possible power transmission in N/mm belt width (standard ambient conditions 23 °C/50% rel. humidity) that the belt type can produce at nominal elongation.

E = Polyester

P = Polyamide

GG = Elastomer G/Elastomer G (Underside/Top face)

TG = Fabric/Elastomer G (Underside/Top face)

GT = Elastomer G/Fabric (Underside/Top face)

K = Wedge splice

Z = Z-splice

Siegling – total belting solutions

Committed staff, quality oriented organization and production processes ensure the constantly high standards of our products and services. The Forbo Siegling Quality Management System is certified in accordance with ISO 9001.

In addition to product quality, environmental protection is an important corporate goal. Early on we also introduced an environmental management system, certified in accordance with ISO 14001.



Ref. no. 262-2
12/17 - UDH - Reproduction of text or parts thereof only with our approval. Subject to change.



Forbo Siegling service – anytime, anywhere

The Forbo Siegling Group employs more than 2,300 people. Our products are manufactured in nine production facilities across the world. You can find companies and agencies with warehouses and workshops in over 80 countries. Forbo Siegling service points are located in more than 300 places worldwide.

Forbo Siegling GmbH

Lilienthalstrasse 6/8, D-30179 Hannover
Phone +49 511 6704 0, Fax +49 511 6704 305
www.forbo-siegling.com, siegling@forbo.com



MOVEMENT SYSTEMS